

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☐ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages

3. ☒ Drawing(s) (35 USC 113) Total Sheets

4. ☒ Patent Application Bibliographic  
Data Sheet Total Sheets

5. ☐ Oath or Declaration Total Pages

- a. ☐ Newly executed (original or copy)  
b. ☐ Unexecuted for information purposes  
c. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 18 completed)  
**[Note Box 6 below]**  
i. ☐ **DELETION OF INVENTOR(S)**  
Signed Statement attached deleting inventor(s)  
named in the prior application, see 37 CFR  
1.63(d)(2) and 1.33(b).

6. ☐ Incorporation By Reference (useable if Box 5c is checked)  
The entire disclosure of the prior application, from which a copy of the  
oath or declaration is supplied under Box 5c, is considered as being  
part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein. The incorporation can only be  
relied upon when a portion has been inadvertently omitted from the  
submitted application parts.

Attorney Docket No.

First Named Inventor or Application Identifier

HISAO NAKAGAWA

Express Mail Label No.

Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

## ADDRESS TO:

7. ☐ Microfiche Computer Program (Appendix)  
8. ☐ Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)  
a. ☐ Computer Readable Copy  
b. ☐ Paper Copy (identical to computer copy)  
c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))  
10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)  
11. ☐ English Translation Document (if applicable)  
12. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS  
Citations  
13. ☐ Preliminary Amendment  
14. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)  
15. ☐ Small Entity ☐ Statement filed in prior application  
Status still proper and desired  
16. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)  
17. ☐ Other: \_\_\_\_\_

18. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_/  
Prior application information: Examiner \_\_\_\_\_ Group/Art Unit: \_\_\_\_\_

## 19. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
TOTAL CLAIMS (37 CFR 1.16(c))		68-20 =	48	X \$ 18.00 =	\$ 864.00
INDEPENDENT CLAIMS (37 CFR 1.16(b))		21-3 =	18	X \$ 78.00 =	\$1,404.00
MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))				\$260.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$ 690.00
				Total of above Calculations =	\$2,958.00
Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).					
				TOTAL =	\$2,958.00

## 20. Small entity status

- a. ☐ A small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

21. ☒ A check in the amount of \$ 2,958.00 to cover the filing fee is enclosed.22. ☐ A check in the amount of \$ \_\_\_\_\_ to cover the recordal fee is enclosed.


## 23. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

## SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME Leonard P. Diana (Reg. No. 29,296)

SIGNATURE



DATE

September 21, 2000

**Abstract**

Family Name:: NAKAGAWA

Postal Address Line Two:: Yamato-shi,

Country:: Japan

Country of Residence:: Japan

Citizenship Country:: Japan

Inventor Two Given Name:: TADASHI

Family Name:: YAMAKAWA

Postal Address Line One:: 19-3, Kamisueyoshi 4-chome,

Postal Address Line Two:: Tsurumi-ku, Yokohama-shi

City:: Kanagawa-ken

Country:: Japan

Country of Residence:: Japan

Citizenship Country:: Japan

Inventor Three Given Name:: EIJI

Family Name:: KATO

Postal Address Line One:: 31-2-618, Hiyoshihoncho 2-chome,

Postal Address Line Two:: Kohoku-ku, Yokohama-shi

City:: Kanagawa-ken

Country:: Japan

Country of Residence:: Japan

Citizenship Country:: Japan

Inventor Four Given Name:: AKIHIRO

Family Name:: KONO

Postal Address Line One:: 15-18, Hiratsuka 2-chome,

Postal Address Line Two:: Shinagawa-ku

City:: Tokyo

Country:: Japan

Country of Residence:: Japan

Citizenship Country:: Japan

Inventor Five Given Name:: YOICHI

Family Name:: KAMEI

Postal Address Line One:: 14-3-201, Chofugaoka 3-chome,

Postal Address Line Two:: Chofu-shi

City:: Tokyo

Country:: Japan

Country of Residence:: Japan

Citizenship Country:: Japan

CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 05514  
Fax:: (212) 218-2200

APPLICATION INFORMATION

Title Line One:: INFORMATION PROCESSING APPARATUS, ITS CONTROL  
Title Line Two:: METHOD, AND STORAGE MEDIUM

Total Drawing Sheets:: 66  
Formal Drawings?: Yes  
Application Type:: Utility  
Docket Number:: 862.C2006  
Secrecy Order in Parent Appl.?: No

REPRESENTATIVE INFORMATION

Representative Customer Number:: 5514

PRIOR FOREIGN APPLICATIONS

Foreign Application One:: 11-272986  
Filing Date:: 09-27-99  
Country:: Japan  
Priority Claimed:: Yes  
Foreign Application Two:: 11-272953  
Filing Date:: 09-27-99  
Country:: Japan  
Priority Claimed:: Yes  
Foreign Application Three:: 11-272952  
Filing Date:: 09-27-99  
Country:: Japan  
Priority Claimed:: Yes  
Foreign Application Four:: 11-272951  
Filing Date:: 09-27-99  
Country:: Japan  
Priority Claimed:: Yes

1. **Introduction**  
 2. **Background**  
 3. **Methods**  
 4. **Results**  
 5. **Conclusion**  
 6. **References**  
 7. **Appendix**  
 8. **Table 1**  
 9. **Table 2**  
 10. **Table 3**  
 11. **Table 4**  
 12. **Table 5**  
 13. **Table 6**  
 14. **Table 7**  
 15. **Table 8**  
 16. **Table 9**  
 17. **Table 10**  
 18. **Table 11**  
 19. **Table 12**  
 20. **Table 13**  
 21. **Table 14**  
 22. **Table 15**  
 23. **Table 16**  
 24. **Table 17**  
 25. **Table 18**  
 26. **Table 19**  
 27. **Table 20**  
 28. **Table 21**  
 29. **Table 22**  
 30. **Table 23**  
 31. **Table 24**  
 32. **Table 25**  
 33. **Table 26**  
 34. **Table 27**  
 35. **Table 28**  
 36. **Table 29**  
 37. **Table 30**  
 38. **Table 31**  
 39. **Table 32**  
 40. **Table 33**  
 41. **Table 34**  
 42. **Table 35**  
 43. **Table 36**  
 44. **Table 37**  
 45. **Table 38**  
 46. **Table 39**  
 47. **Table 40**  
 48. **Table 41**  
 49. **Table 42**  
 50. **Table 43**  
 51. **Table 44**  
 52. **Table 45**  
 53. **Table 46**  
 54. **Table 47**  
 55. **Table 48**  
 56. **Table 49**  
 57. **Table 50**  
 58. **Table 51**  
 59. **Table 52**  
 60. **Table 53**  
 61. **Table 54**  
 62. **Table 55**  
 63. **Table 56**  
 64. **Table 57**  
 65. **Table 58**  
 66. **Table 59**  
 67. **Table 60**  
 68. **Table 61**  
 69. **Table 62**  
 70. **Table 63**  
 71. **Table 64**  
 72. **Table 65**  
 73. **Table 66**  
 74. **Table 67**  
 75. **Table 68**  
 76. **Table 69**  
 77. **Table 70**  
 78. **Table 71**  
 79. **Table 72**  
 80. **Table 73**  
 81. **Table 74**  
 82. **Table 75**  
 83. **Table 76**  
 84. **Table 77**  
 85. **Table 78**  
 86. **Table 79**  
 87. **Table 80**  
 88. **Table 81**  
 89. **Table 82**  
 90. **Table 83**  
 91. **Table 84**  
 92. **Table 85**  
 93. **Table 86**  
 94. **Table 87**  
 95. **Table 88**  
 96. **Table 89**  
 97. **Table 90**  
 98. **Table 91**  
 99. **Table 92**  
 100. **Table 93**  
 101. **Table 94**  
 102. **Table 95**  
 103. **Table 96**  
 104. **Table 97**  
 105. **Table 98**  
 106. **Table 99**  
 107. **Table 100**  
 108. **Table 101**  
 109. **Table 102**  
 110. **Table 103**  
 111. **Table 104**  
 112. **Table 105**  
 113. **Table 106**  
 114. **Table 107**  
 115. **Table 108**  
 116. **Table 109**  
 117. **Table 110**  
 118. **Table 111**  
 119. **Table 112**  
 120. **Table 113**  
 121. **Table 114**  
 122. **Table 115**  
 123. **Table 116**  
 124. **Table 117**  
 125. **Table 118**  
 126. **Table 119**  
 127. **Table 120**  
 128. **Table 121**  
 129. **Table 122**  
 130. **Table 123**  
 131. **Table 124**  
 132. **Table 125**  
 133. **Table 126**  
 134. **Table 127**  
 135. **Table 128**  
 136. **Table 129**  
 137. **Table 130**  
 138. **Table 131**  
 139. **Table 132**  
 140. **Table 133**  
 141. **Table 134**  
 142. **Table 135**  
 143. **Table 136**  
 144. **Table 137**  
 145. **Table 138**  
 146. **Table 139**  
 147. **Table 140**  
 148. **Table 141**  
 149. **Table 142**  
 150. **Table 143**  
 151. **Table 144**  
 152. **Table 145**  
 153. **Table 146**  
 154. **Table 147**  
 155. **Table 148**  
 156. **Table 149**  
 157. **Table 150**  
 158. **Table 151**  
 159. **Table 152**  
 160. **Table 153**  
 161. **Table 154**  
 162. **Table 155**  
 163. **Table 156**  
 164. **Table 157**  
 165. **Table 158**  
 166. **Table 159**  
 167. **Table 160**  
 168. **Table 161**  
 169. **Table 162**  
 170. **Table 163**  
 171. **Table 164**  
 172. **Table 165**  
 173. **Table 166**  
 174. **Table 167**  
 175. **Table 168**  
 176. **Table 169**  
 177. **Table 170**  
 178. **Table 171**  
 179. **Table 172**  
 180. **Table 173**  
 181. **Table 174**  
 182. **Table 175**  
 183. **Table 176**  
 184. **Table 177**  
 185. **Table 178**  
 186. **Table 179**  
 187. **Table 180**  
 188. **Table 181**  
 189. **Table 182**  
 190. **Table 183**  
 191. **Table 184**  
 192. **Table 185**  
 193. **Table 186**  
 194. **Table 187**  
 195. **Table 188**  
 196. **Table 189**  
 197. **Table 190**  
 198. **Table 191**  
 199. **Table 192**  
 200. **Table 193**  
 201. **Table 194**  
 202. **Table 195**  
 203. **Table 196**  
 204. **Table 197**  
 205. **Table 198**  
 206. **Table 199**  
 207. **Table 200**  
 208. **Table 201**  
 209. **Table 202**  
 210. **Table 203**  
 211. **Table 204**  
 212. **Table 205**  
 213. **Table 206**  
 214. **Table 207**  
 215. **Table 208**  
 216. **Table 209**  
 217. **Table 210**

## 5

10

## 19

20

Upon updating a home page, the user must edit his or her home page on the terminal, and then must upload the edited result to a WWW server.

Although it is not common to update a personal  
5 home page so frequently, if a need to update a home page frequently arises, such works are complicated and result in another factor of cost increase.

For example, a home page that displays menu items of a cafeteria will be examined. In this case, when a  
10 menu item has changed, it is required to quickly update an open image list page. More specifically, the following processes will be done. That is, an image of each menu item is sensed using a digital camera or the like, and that image data is captured using an HTML  
15 document editor or the like and is edited. Finally, the obtained data is then uploaded to the WWW server.

Therefore, as soon as a menu item has changed, one must contact an editor to ask him or her to start editing. In other words, the editor must stand by  
20 while a menu item change is likely to occur, resulting in high running cost. Also, updating is troublesome. Furthermore, it is not easy to precisely lay out an object to be sensed in correspondence with the image sensing position.

25 If there are documents or images which are not to be open to the public, the operator must examine such

documents or images one by one whether to open them to the public.

#### SUMMARY OF THE INVENTION

5           The present invention has been made in consideration of the above problems and has as its object to provide an information processing apparatus which can easily update an image contained in a document which is submitted on the network, its control  
10 method, and a storage medium.

          In order to achieve the above object, an image processing apparatus according to the present invention comprises the following arrangement. That is, an information processing apparatus for submitting  
15 document information including an image via a network, comprises image input means, schedule storage means for storing input schedule information of the image input means, image storage means for storing an image obtained in accordance with the schedule information,  
20 and document creation means for creating new document information by substituting an image in the document information by the image stored in the image storage means.

          It is another object of the present invention to  
25 provide an information processing apparatus which can easily update an image contained in a document which is

submitted on the network, and can make an image of an  
object to be sensed fall within the field range the  
user intended without precisely designating the image  
sensing position, its control method, and a storage  
5 medium.

In order to achieve the above object, an image  
processing apparatus according to the present invention  
comprises the following arrangement. That is, an  
information processing apparatus for submitting  
10 document information including an image via a network,  
comprises image input means, schedule input means for  
inputting schedule information pertaining to image  
capture of the image input means, correction means for  
correcting the schedule information input by the  
15 schedule input means, image storage means for storing  
an image obtained in accordance with new schedule  
information corrected by the correction means, and  
document creation means for creating document  
information on the basis of an image stored in the  
20 image storage means.

It is still another object of the present  
invention to provide an information processing  
apparatus which can easily update an image contained in  
a document which is submitted on the network, and can  
25 automatically make it open on the network, its control  
method, and a storage medium.





condition to be closed, its control method, and a storage medium.

In order to achieve the above object, an image processing apparatus according to the present invention comprises the following arrangement. That is, an information processing apparatus for submitting document information including an image via a network, comprises image input means, schedule storage means for storing input schedule information of the image input means, image storage means for storing an image obtained in accordance with the schedule information, document creation means for creating new document information by substituting an image in the document information by the image stored in the image storage means, and setting means for setting a condition for inhibiting an image, which is input by the image input means and is stored, from being published, wherein an image that satisfies the condition set by the setting means is determined not to be published, and is excluded from images to be submitted.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the arrangement of a camera server according to the first embodiment of the present invention;

5        Fig. 2 is a diagram showing the system arrangement to which a camera server of each embodiment is applied;

10       Fig. 3 shows a user interface with which the user sets an image sensing schedule of the camera server in the first embodiment;

Fig. 4 is a chart showing the flow of image edit processes in the first embodiment;

Fig. 5 is a chart for explaining the flow of page authentication processes in the first embodiment;

15       Fig. 6 is a flow chart showing the processing sequence of an operation setup program in the first embodiment;

20       Fig. 7 is a flow chart showing the processing sequence of a video recording execution program in the first embodiment;

Fig. 8 is a flow chart showing the processing sequence of a candidate edit program in the first embodiment;

25       Fig. 9 is a flow chart showing the processing sequence of a page select program in the first embodiment;

Fig. 10 is a block diagram showing the arrangement of a camera server according to the second embodiment of the present invention;

Fig. 11 is a chart showing the flow of image edit  
5 processes in the second embodiment;

Fig. 12 is a flow chart showing the processing sequence of a candidate edit program in the second embodiment;

Fig. 13 is a view showing the contents of a  
10 substitute table in the second embodiment;

Fig. 14 shows a display example in an image select process in the second embodiment;

Fig. 15 is a block diagram showing the arrangement of a camera server according to the third  
15 embodiment of the present invention;

Fig. 16 shows a user interface with which the user sets an image sensing schedule of the camera server in the third embodiment;

Fig. 17 is a flow chart showing the processing  
20 sequence of an upload program in the third embodiment;

Fig. 18 shows an example of a deleted image list page in the third embodiment;

Fig. 19 is a block diagram showing the arrangement of a camera server according to the fourth  
25 embodiment of the present invention;

Fig. 20 shows the storage state of image data in an auxiliary storage device in the fourth embodiment;

Fig. 21 shows a list of displacement camera angle information generated from camera angle information in the fourth embodiment;

Fig. 22 shows an example of displacement camera angle setup window in the fourth embodiment;

Fig. 23 is a flow chart showing the operation of a video recording execution program in the fourth embodiment;

Fig. 24 is a chart showing the flow of image edit processes in the fourth embodiment;

Fig. 25 is a flow chart showing the processing contents of a candidate edit program in the fourth embodiment;

Fig. 26 shows an example of a substitute image select window in the fourth embodiment;

Fig. 27 shows an example of an edit window in the fifth embodiment of the present invention;

Fig. 28 is a flow chart showing the processing contents of a candidate edit program in the fifth embodiment;

Fig. 29 is a flow chart showing the operation of a video recording execution program in the fifth embodiment;

Fig. 30 is a flow chart showing the processing contents of a candidate edit program in the fifth embodiment;

Fig. 31 shows an example of an edit window in the  
5 fifth embodiment;

Fig. 32 is a view for explaining the operation setups for setting an image sensing schedule of a camera server in the sixth embodiment;

Fig. 33 shows an example of a window upon  
10 creating an initial candidate page in the sixth embodiment;

Fig. 34 is a flow chart showing the contents of an initial candidate page creation process in the sixth embodiment;

Fig. 35 is a chart showing the flow of image edit processes in the eighth embodiment;

Fig. 36 is a flow chart showing the processing contents of a candidate edit program in the eighth embodiment;

Fig. 37 is a block diagram showing the arrangement of a camera server according to the ninth embodiment of the present invention;

Fig. 38 is a view for explaining the operation setups for setting an image sensing schedule of the  
25 camera server in the ninth embodiment;

Fig. 39 is a flow chart for explaining the flow of an operation setup program in the ninth embodiment;

Fig. 40 is a flow chart for explaining the flow of a page select program in the ninth embodiment;

5 Fig. 41 is a block diagram showing the arrangement of a camera server according to the 10th embodiment of the present invention;

Fig. 42 is a flow chart showing the processing contents of a candidate edit program in the 10th  
10 embodiment;

Fig. 43 shows the contents of a candidate importance list in the 11th embodiment of the present invention;

Fig. 44 is a flow chart showing the processing contents of a page select program in the 11th  
15 embodiment;

Fig. 45 is a block diagram showing the arrangement of a camera server in the 11th embodiment;

Fig. 46 shows the contents of a candidate  
20 importance list in the 11th embodiment;

Fig. 47 is a block diagram showing the arrangement of a camera server according to the 12th embodiment of the present invention;

Fig. 48 is a chart showing an example of the flow  
25 of image edit process in the 12th embodiment;

Fig. 49 is a flow chart showing the processing contents of a candidate edit program in the 12th embodiment;

Fig. 50 shows the contents of a candidate  
5 importance list in the 12th embodiment;

Fig. 51 is a block diagram showing the arrangement of a camera server according to the 13th embodiment of the present invention;

Fig. 52 is a chart showing an example of the flow  
10 of image edit processes in the 13th embodiment;

Fig. 53 is a flow chart showing the processing contents of a candidate edit program in the 13th embodiment;

Fig. 54 shows the contents of a candidate  
15 importance list in the 13th embodiment;

Fig. 55 shows the contents of an image importance list in the 13th embodiment;

Fig. 56 is a block diagram showing the arrangement of a camera server according to the 14th  
20 embodiment of the present invention;

Fig. 57 is a chart showing an example of the flow of image edit processes in the 14th embodiment;

Fig. 58 is a flow chart showing the contents of a candidate list display process in the 14th embodiment;



Fig. 59 is a block diagram showing the arrangement of a camera server according to the 15th embodiment of the present invention;

Fig. 60 shows an example of publication inhibition setups in the 15th embodiment;

Fig. 61 is a flow chart showing the contents of a publication inhibition setup process in the 15th embodiment;

Fig. 62 is a chart showing an example of the flow of image edit processes in the 15th embodiment;

Fig. 63 is a flow chart showing the contents of a candidate edit process in the 15th embodiment;

Fig. 64 shows an example of the contents of a publication list in the 15th embodiment;

Fig. 65 is a block diagram showing the arrangement of a camera server according to the 16th embodiment of the present invention;

Fig. 66 is a flow chart showing the contents of a candidate edit process in the 16th embodiment;

Fig. 67 shows an example of the contents of an image importance list in the 16th embodiment; and

Fig. 68 shows an example of a page created by the 17th embodiment of the present invention.

Preferred embodiments of the present invention will be described in detail hereinafter with reference to the accompanying drawings.

[First Embodiment]

5           Fig. 2 shows the arrangement of a system used in each embodiment. Referring to Fig. 2, reference numeral 100 denotes a camera server which serves as an image edit system; and 110, a network (the Internet or the like). Reference numeral 202 denotes a client  
10           connected to the network 110; and 203, a WWW (World Wide Web) server that offers WWW services.

          In this embodiment, a home page (to be simply referred to as a page hereinafter) is edited/created on the basis of images sensed/recorded by the camera  
15           server 100, and is uploaded to the WWW server 203. When the user accesses the WWW server 203 via the client 202, he or she can browse through images (pages) sensed by the camera server 100.

          Fig. 1 shows the arrangement of the camera server  
20           100 which serves as an image edit system in the embodiment.

          In the camera server 100, a memory 101 for storing programs and data required for starting up the system, a central processing unit 102 for controlling  
25           arithmetic operations and processes, a CRT 103 as a display device for displaying characters, symbols,

images, and the like, an image input interface 104 for capturing images, a serial interface 105 for exchanging control commands and the like, an auxiliary storage device (hard disk or the like) 106 for saving data, a  
5 keyboard device 107 for inputting characters and the like, a pointing device 108 used to point to a displayed character or the like using a cursor, and a network communication interface 109 for exchanging data among many locations are connected via a bus 112.

10       The camera server 100 is connected to the network 110 via the network communication interface 109.

          A camera 111 is connected to the image input interface (VC) 104 for capturing images and the serial interface (RS) 105 for receiving control commands and  
15 the like, and sending status signals (current status and the like). That is, the image sensing conditions of the camera 111 (pan angle, tilt angle, zoom ratio, exposure, and the like) are controlled by sending commands via the RS 105. An image sensed by the camera  
20 111 is received by the VC 104, and is captured as digital data. A program associated with this control is stored in the memory 101.

          The memory 101 mainly stores an operation setup program 113, video recording execution program 114,  
25 candidate edit program 115, and page select program 116.

The operations of this embodiment with the  
10   aforementioned arrangement will be described in detail  
     in turn below.

When the time set by the operator upon executing the operation setup program 113 has been reached, the camera server 110 controls the camera 111 to sense a video at a predetermined position, and stores the sensed video.

Fig. 3 shows an example of the operation setups for setting an image sensing schedule of this camera server, and the flow of the operation setup program will be explained below using the flow chart in Fig. 6.

Default setup data (not shown) are read from the auxiliary storage device 106 (S601), and a setup page window 301 in Fig. 3 is displayed in accordance with the read data (S602). If no setup data is available, 25 items to be described below have no entries.

On this window, fields 302, 303, and 304 are respectively used to input the image sensing start time, image sensing end time, and image sensing interval.

Pan, tilt, and zoom information of the first  
5 preset position can be respectively input using fields 306-1p, 306-1t, and 306-1z. Pan, tilt, and zoom information of the second preset position can be respectively input using fields 306-2p, 306-2t, and 306-2z. Likewise, in this embodiment, a maximum of  
10 five preset positions can be input using the corresponding fields. Of course, the number of preset positions can be increased/decreased as needed.

The setup input process in step S604 repeats itself until a setup save button 307 is pressed. If  
15 the setup save button 307 has been pressed, the flow advances to step S605 (S603).

In the setup input process (step S604), data input in various fields are checked to change display of input data. In the example of Fig. 3, the image  
20 sensing start time, image sensing end time, image sensing interval, and camera angle information of the first to fourth preset positions are set.

Since no data is designated for the fifth preset position, image sensing and video recording at four  
25 preset positions are designated at the designated image

002250-03270900

sensing interval from the image sensing start time to the image sensing end time.

In step S605, respective pieces of displayed information are written in a setup file in the

5 auxiliary storage device 106.

In the example shown in Fig. 3, the setup file that designates to sense four images from an image with a camera angle of the first preset position (pan value = 9.72, tilt value = 0.00, and zoom value = 46.80) to

10 an image with a camera angle of the fourth preset position (pan value = 11.30, tilt value = 5.00, and zoom value = 40.00) at each of image sensing timings of 20-min intervals (a total of six timings) from 10:00 until 11:40 is saved.

15 Note that registration is made in the operating system to launch the video recording execution program 114 at each image sensing time.

When the time designated by the operation setup program has been reached, the video recording execution

20 program 114 is launched to sense and store videos.

The flow of the video recording execution program will be explained below using the flow chart in Fig. 7.

Data (not shown) of the setup file are read from the auxiliary storage device 106 (step S701), and an

25 image capture command of a predetermined camera angle corresponding to each preset position is sent to the

camera 111 to control the camera 111 to capture an image. The captured image is written in the auxiliary storage device in correspondence with each image capture timing and preset position (step S702).

- 5           For example, the following image capture command is issued to the camera 111 for the first preset position shown in Fig. 3:

GetStillImage?pan=9.72&tilt=0.00&zoom=46.80&...

- Then, as shown in Fig. 1, from image sensing time  
10 10:00, images at the first, second, third, and fourth preset positions are respectively saved as files "image data 120-1-1", "image data 120-2-1", "image data 120-3-1", and "image data 120-4-1" in the auxiliary storage device 106.

- 15           Likewise, from the next image sensing time 10:20, images at the first preset position, second preset position,... are saved as files "image data 120-1-2", "image data 120-2-2",.... Upon completion of all image sensing schedules by repeating the aforementioned  
20 processes, the video recording execution program ends.

- In the above description, the operation setup data is saved in the auxiliary storage device 106. Alternatively, data may be kept stored in the memory 101 without being erased even after the operation setup  
25 program 113 ends.

Fig. 4 shows an example of the flow of image edit processes.

The flow of the candidate edit program 115 will be explained using the flow chart in Fig. 8. This  
5 process starts when a page candidate editor launches the page select program 115.

This embodiment will explain an example wherein a "cafeteria menu page" (for example, an intranet is built in a given company, and a menu page of a  
10 cafeteria of that company) is created.

A candidate list window 410 used to select a page to be edited is displayed (step S801).

If no image page candidate is available, an image page that displays a list of images at a specific time  
15 of the respective image sensing positions is automatically generated on the basis of image data which have been sensed and stored, and the flow advances to step S802 to display this page.

If one candidate is selected, a change image  
20 select window 411 that shows the image page generated by the system as page plan 1 is displayed (step S802).

In this case, as shown in page plan data 401 before edit, page plan 1 uses first candidate images of the first to fourth preset positions like image data  
25 120-1-1, 120-2-1,....





106 (step S806). The candidate list is updated (step  
S807). In the next edit process, a candidate list  
window 414 to which a new candidate is added is  
displayed. The candidate edit program has been  
5 explained.

Upon completion of all image substitute edit  
processes, the page select program 116 executes a page  
authentication process and an upload process to the WWW  
server 203.

10 This process is started when an approver launches  
the page select program 116.

Fig. 5 shows an example of the flow of this page  
authentication. The flow of the page select program  
will be explained below using the flow chart in Fig. 9.

15 Connection to the WWW server is established, and  
an authentication window 501 of the approver is  
displayed at that time to execute a password  
authentication process (step S901). If authentication  
has failed, the process is interrupted.

20 If authentication has succeeded, a candidate page  
select window 502 is displayed (step S902). Upon  
selection of a candidate, a page approval process  
window 503 is displayed (step S903). If a reject  
button 510 has been pressed on this window, the process  
25 ends; if it is determined that an approval button 511

has been pressed (step S904), the flow advances to step S905.

In step S905, the approved image page is uploaded to the WWW server 203, thus ending the process. When a public network is used in place of an intranet (e.g., when the Internet is used), a line disconnection process may be done upon completion of transfer.

With the aforementioned sequence, the WWW service on the WWW server 203 publishes the image page on the network, and the user can access that page via a WWW browser on the client.

The page select program has been explained.

Note that a plurality of persons can use this system as image page candidate editors.

Based on a page that has been edited by a given editor, another editor can easily create another image page. Hence, candidate plans are created by volunteers, and a manager can finally select and approve one of such candidate plans and publish the selected page.

As described above, according to this embodiment, an image page can be created by selecting only appropriate sensed images in units of positions, and the load of the edit work can be greatly reduced. By selecting a substitute sensed image for only a position which is required to be changed on the image page automatically created by the system, the image page can

be modified. Hence, an image of a given position where the image is not sensed satisfactorily need only be changed, thus further reducing the load of the edit work. Furthermore, a plurality of volunteers can  
5 create some image page candidates, and by only selecting one of a plurality of created image page candidates, the image page can be uploaded to and published on the WWW server, thus further reducing running cost.

10 [Second Embodiment]

In the above embodiment (first embodiment), images are evenly displayed on the candidate page. However, the present invention is not limited to such specific embodiment.

15 In the second embodiment, whether each image to be displayed is approved is indicated upon displaying a candidate page. In this manner, the editor can recognize at a glance whether or not each image has been edited, thus improving the edit efficiency of an  
20 image page.

The second embodiment will be described in detail below.

The system arrangement can be achieved by replacing the candidate edit program 115 in the camera  
25 server block diagram shown in Fig. 1 by a candidate edit program 115' in Fig. 10.

A substitute recording table 121 is added to the contents of the HD 106 in the camera server block diagram in Fig. 1 of the first embodiment, as shown in Fig. 10.

5       The operation of the second embodiment will be described in detail below.

          The operations of the operation setup program 113, video recording execution program 114, and page select program 116 are the same as those in the first  
10   embodiment.

          Fig. 11 shows an example of the flow of image edit processes. In Fig. 11, reference numeral 412a denotes a button used to support (approve) the selected image (image 2-3 in Fig. 11) as it is. When an image  
15   is selected, the selected image is displayed so that its frame is different from those of other non-selected images, thus informing the operator of the selected image. In this case, various display patterns may be used and, for example, the color, width, or the like of  
20   the frame may be changed. When the image that has already been supported is selected again, indication on the agree button 412a is switched to "support cancel", and when the button in this state is selected, support can be canceled.

25       Fig. 13 shows an example of the substitute recording table 121.

Tables are held in correspondence with the first to fourth preset positions of respective image data of each candidate page, and when an image is substituted or is agreed upon, a check mark is recorded in the  
5 corresponding field.

Since candidate page 1 is automatically generated by the page select program 115, and images on this page are neither selected nor supported, the fields of all the preset positions are blank.

10 A table for a new candidate page is added by copying the same information as that of the source candidate page when a given image is substituted or supported for the first time. When an image that has been supported undergoes operation for canceling that  
15 support, a check mark in the corresponding field is removed, and that image undergoes the same operation as in an unchecked state.

The flow of the operation of the candidate edit program 115' is substantially the same as that in the  
20 flow chart in Fig. 8 of the first embodiment, except that the process in step S805 is changed to a substitute image select process in step S805', as shown in Fig. 12.

Steps S801, S803, S804, S806, and S807 in Fig. 12  
25 use the same step numbers as those in Fig. 8 of the

first embodiment, since they have the same processing contents.

In step S805' after an image is selected in step S804, a substitute image select window 412' added with  
5 the image support button 412a is displayed. If the button 412a has been pressed, the selected image is left unchanged; if another image is selected, the selected image is substituted by that image.

In either case, a check mark is recorded in the  
10 corresponding field of the substitute recording table 121. The flow returns to step S802 to execute a candidate page display process.

In the candidate page display process in step S802, emphasized display (e.g., the selected or  
15 supported image is bounded by a bold frame 1400, as shown in Fig. 14) is made on the change image select window 411 and substitute image confirm window 413 in Fig. 11, a new page plan generation window, or the like. In this manner, the editor can clearly recognize the  
20 selected or supported image. Also, the total of the list in Fig. 13 may be computed to display the number of supports together.

In step S801, when the source candidate page is selected from the candidate list for the first time,  
25 the page may be displayed using the substitute record of the source page from the substitute recording table

121, and when a new candidate page is created by selecting or supporting a given image, the page may be displayed using a newly created substitute record of the new candidate page.

5           In this manner, after the source candidate page emphasizes images that have been substituted and supported on its source page (the source of the source candidate page), a new candidate image can be created.

Also, images that have been neither selected nor  
10 supported can be consequently emphasized.

As a result, the editor can recognize images that have not been edited, thus improving the edit efficiency of an image page.

As described above, according to the second  
15 embodiment, a satisfactory image page can be easily created using edit records of selection and support on image pages created by volunteers.

Especially, since the source candidate page emphasizes images that have been substituted and  
20 supported on its source page (the source of the source candidate page), only an image which is not supported can be substituted, and a new, satisfactory candidate page can be created more easily.

Since images that have been selected or supported  
25 are emphasized upon editing a candidate page, a new, satisfactory candidate page can be created easily.



Furthermore, since images that have been neither selected nor supported are emphasized upon creating a candidate page, the editor can recognize images to be edited, thus improving the edit efficiency of an image  
5 page, and allowing easy creation of a new, satisfactory candidate page. Also, since the editor can know images that have not been edited, a new, satisfactory candidate page can be easily created.

[Third Embodiment]

10 The second embodiment emphasizes images using substitute information of each image. However, the present invention is not limited to such specific embodiment.

In the third embodiment, if there is an image  
15 which has been neither substituted nor supported upon approving a candidate page, the page is approved after that image is substituted by a predetermined image which is prepared in advance.

In this manner, an image that has not been edited  
20 is substituted by a preferred image using a predetermined image prepared in advance, thus improving the appearance of the image page.

The third embodiment will be described in detail below.

25 The system arrangement is substantially the same as that in Fig. 10 of the second embodiment, except

that the operation setup program 113 and page select program 116 in Fig. 10 are replaced by an operation setup program 113' and page select program 116', and an upload process program 117 is added, as shown in

5 Fig. 15.

Also, preferred images 150-1, 150-2,..., 150-4 are added to the contents of the HD 106 of the second embodiment.

The operation of the third embodiment will be  
10 described in detail below.

The operation of the video recording execution program 114 is the same as that in the second embodiment.

The operation of the candidate edit program 115'  
15 is the same as that in the second embodiment.

Fig. 16 shows an example of operation setups of the operation setup program 113'.

In the operation setups in Fig. 16, predetermined image setup fields 151-1, 151-2,..., 151-4 are added to  
20 the example of the operation setups shown in Fig. 3 of the first embodiment.

In the predetermined image setup fields 151-1, 151-2,..., 151-4, file names or the like that indicate the preferred images 150-1, 150-2,..., 150-4 at the  
25 respective preset positions are input to save the preferred images in the HD 106.

3  
4  
5 The flow of the operation of the operation setup  
program 113' is substantially the same as that of the  
operation setup program 113 in Fig. 6 of the first  
embodiment, except that a preferred image setup process  
is added. For example, when a given predetermined  
image setup field is selected on the operation setup  
window in Fig. 3, the window is switched to a preferred  
image designation window to designate a preferred image.

6  
7  
8  
9  
10 Also, the operation of the page select program  
116' is substantially the same as the example of the  
operation of the page setup program 116 in Fig. 5 of  
the first embodiment, except that a preferred image is  
added. In the flow of the operation of the page select  
program 116', the contents of the page upload process  
15 in step S905 in Fig. 9 of the first embodiment are  
modified.

16  
17  
18 The flow of the operation of the upload process  
program 117 in the third embodiment will be described  
below using the flow chart in Fig. 17.

19  
20 As in step S904 in Fig. 9 of the first embodiment,  
upon depression of the approval button, the upload  
process program 117 is launched.

21  
22 In step S1701, the substitute record of the  
approved candidate page is read from the substitute  
25 recording table 121 to search for a preset position  
which is neither selected nor supported.

In step S1702, an image of the found preset position is substituted by an image of the approved candidate page selected from the preferred images 150-1, 150-2, ..., 150-4.

5           In this manner, an image which is neither changed nor supported is substituted by a preset image, and the page is uploaded.

          In this case, the preset position, the image of which is neither selected nor supported, may be deleted  
10       from the candidate page.

          For example, when an image of preset position 4 on the candidate page has been neither selected nor supported, a candidate page formed by only preset positions 1 to 3 is created and approved.

15           Fig. 18 shows an example of the image page approved in this case.

          In this manner, an image that has not been edited can be automatically substituted by a preferred image, thus improving the appearance of an image page.

20           Alternatively, by deleting an image which has not been edited, only preferred images can be published, and the appearance of the image page can be improved.

          As described above, according to the third embodiment, when a given candidate page is approved and  
25       is open to the public, an image that has not been

edited can be automatically substituted by a preferred image, thus improving the appearance of the image page.

Alternatively, upon approving and publishing a given candidate page, the appearance of the image page  
5 can be improved by deleting an image which has not been edited.

In the above embodiments, the operation setup program, video recording execution program, candidate edit program, page select program, and the like are  
10 executed on the camera server 100. Alternatively, if the camera server 100 interprets the commands and sends back a sensed image to an information processing device to which the commands have been sent, that information processing device may execute these programs.

For example, the WWW server 203 may implement  
15 operation setup, video recording execution, candidate edit, and page select processes. In this case, if the operation setup program 113, video recording execution program 114, candidate edit program 115, and page  
20 select program 116 are described as CGI (Common Gateway Interface) programs, the user can execute these programs via WWW services on the WWW server 203.

With this arrangement, the image page editor or approver need not visit the camera server 100, and can  
25 edit sensed data at a remote place via the network.

Alternatively, the video recording execution program may be executed on the camera server, and the operation setup program, candidate edit program, page select program, and the like may be executed on the WWW  
5 server 203.

In this case, data set by the operation setup program can be transferred to the camera server 100, which executes video recording on the basis of the transferred data. When the candidate edit program 115  
10 or page select program 116 requires image data, the image data can be transferred from the camera server 100 to undergo the corresponding process.

In this manner, since image sensing and video recording are locally done, image capture failures can  
15 be prevented. On the other hand, images may be captured from a plurality of camera servers on the network. As a result, for example, images of display racks at a plurality of positions can be combined to create a menu.

Note that this embodiment is applied to creation of a page of displayed items such as a cafeteria menu. Also, this embodiment can be applied to creation of a page of a pet list of a pet shop in which cages containing animals are stacked, and a creation of a  
25 list page of potted plants on a broad floor like a gardening shop. Also, this embodiment can be applied

to creation of an image page that collects best shots at respective camera angles by sensing images of street corners, resort facilities, and the like. Also, this embodiment can be applied to creation of camera

5 site-dependent best shot collections if images sensed by a plurality of cameras are used irrespective of their camera angles. That is, the present invention is not limited to any specific objects to be sensed.

In place of selecting images automatically sensed  
10 and stored by the camera at respective positions of an image page, the image page may be divided into a plurality of sections, candidate images of the respective sections may be prepared in advance, and a plurality of editors may change images of arbitrary  
15 sections as partial images, thus creating an image page in collaboration.

For example, by preparing, as candidate images, product images having variations of chromaticity, lightness, and saturation values, cuts that express  
20 different seasons, illustrations that suggest various scenes of sports, hobbies, and the like, and so forth, a product catalog page, facility guide page, and the like can be created in collaboration.

Furthermore, the image itself may be segmented  
25 into a plurality of areas, and respective partial images may be substituted or modified. When a facility

guide or event guide is expressed by an image like a route sketch, or when products, exhibits, or the like are introduced together with various illustrations, cuts, and the like in a single picture, a guide board, 5 guide map, and the like can be easily created in collaboration by substituting or modifying partial images.

To restate, according to the first embodiment, an image page can be created by selecting only appropriate 10 sensed images in units of positions, and the load of the edit work can be greatly reduced.

By selecting a substitute sensed image for only a position which is required to be changed on the image page automatically created by the system, the image 15 page can be modified. Hence, an image of a given position where the image is not sensed satisfactorily need only be changed, thus further reducing the load of the edit work.

Furthermore, a plurality of volunteers can create 20 some image page candidates, and by only selecting one of a plurality of created image page candidates, the image page can be uploaded to and published on the WWW server, thus further reducing running cost.

In the second embodiment, since the source 25 candidate page emphasizes images that have been substituted and supported on its source page (the



source of the source candidate page), a new, satisfactory candidate page can be created more easily.

Also, in the second embodiment, since images that have been selected or supported are emphasized upon editing a candidate page, a new, satisfactory candidate page can be created easily. Furthermore, since images that have been neither selected nor supported are emphasized upon creating a candidate page, the editor can recognize images to be edited, thus improving the edit efficiency of an image page, and allowing easy creation of a new, satisfactory candidate page. Also, since the editor can know images that have not been edited, a new, satisfactory candidate page can be easily created.

According to the third embodiment, when a given candidate page is approved and is open to the public, an image that has not been edited can be automatically substituted by a preferred image, thus improving the appearance of an image page. Alternatively, upon approving and publishing a given candidate page, the appearance of an image page can be improved by deleting an image which has not been edited.

As described above, according to the first to third embodiments, an image to be included in a document which is submitted on the network can be easily updated.

[Fourth Embodiment]

The fourth embodiment of the present invention will be described below.

The arrangement of a camera server that allows  
5 the operation of the fourth embodiment is substantially the same as that shown in Fig. 1. Hence, portions unique to the camera server that constructs the fourth embodiment will be explained below.

On the memory 101, as shown in Fig. 19, an  
10 operation setup program 10113, video recording execution program 10114, and candidate edit program 10115 as characteristic features of the fourth embodiment are stored.

Also, the auxiliary storage device 106 saves data  
15 as a characteristic feature of the fourth embodiment (see Fig. 20 to be described later).

The basic operation of the fourth embodiment with the above arrangement is the same as that of the first embodiment, and an operation unique to the fourth  
20 embodiment will be explained below.

The camera server 100 senses and stores videos at predetermined locations at times set in advance by the operator upon executing the operation setup program 10113.

25 The flow of the operation setup program is substantially the same as that in the first embodiment,

and Fig. 3 and the flow chart in Fig. 6 will be explained below while substituting portions unique to the fourth embodiment.

In Fig. 6, the operations from step S601 to step  
5 S604 are the same as those in the first embodiment, but the operation in step S605 in the fourth embodiment is as follows.

Pieces of information displayed on the setup page window 301 are written in setup data (not shown) on the  
10 auxiliary storage device. Then, displacement camera angle information is generated for each preset position on the basis of camera angle information of the corresponding preset position.

The displacement camera angle information is  
15 information of a new camera angle consisting of values obtained by slightly increasing/decreasing the values designated by the operator. For example, when a pan value = 9.72 is increased/decreased to have a displacement difference = 1 so as to obtain two values  
20 each before and after the original value, information having pan values = 7.72, 8.72, 10.72, and 11.72 is obtained. Such information is generated for each of the pan, tilt, and zoom values. Fig. 21 shows an example of a list of displacement camera angle  
25 information generated from the camera angle information of the first preset position on the window 301.

In the example shown in Fig. 21, two out of the pan, tilt, and zoom values are fixed to generate displacement values, but the present invention is not limited to such specific example. Two values each before and after a given value are generated, but the present invention is not limited to such specific generation range. Alternatively, the operator may input or designate these values. A displacement setup window 10201 shown in Fig. 22 is an example for such process.

After the displacement camera angle information for each preset position is generated, it is written in displacement setup data (not shown) on the auxiliary storage device.

15           Also, registration is made in the OS to launch  
the video recording execution program 10114 at each  
image sensing time.

The operation of the operation setup program 10113 has been explained.

20           When the time designated by the operation setup  
program has been reached, the video recording execution  
program 10114 is launched to sense and store videos.  
The operation of the video recording execution program  
will be explained below using the flow chart in Fig. 23.

25       The setup data stored in the auxiliary storage  
device are read (step S10301), and displacement setup

data is then determined. The displacement setup data is obtained by reading displacement setup data (not shown) from the auxiliary storage device or is computed from the setup data by uniquely setting a displacement  
5 difference (step S10302).

The setup data is extracted in turn from the first one in units of preset positions, and if preset position data does not reach an end, the flow advances to step S10304; otherwise, the program ends (step  
10 S10303).

In step S10304, an image is sensed and stored at the camera angle of the extracted preset position. A predetermined command is sent to the camera 111 to control the camera, thus capturing an image.

15 The captured image is stored by writing data in the auxiliary storage device 106. If an image is captured at the first image sensing time of the second preset position, that image is saved as image data 10000-2-1-0; if an image is captured at the m-th image  
20 sensing time, that image is saved as image data 10000-2-m-0.

Subsequently, data of the corresponding preset position is extracted from the displacement setup data, and is processed in turn from the first one. If  
25 displacement setup data to be processed still remain,

the flow advances to step S10306; otherwise, the flow returns to step S10303.

In step S10306, an image is sensed and stored at the displacement camera angle of the extracted preset  
5 position. A predetermined command is sent to the camera 111 to control the camera, thus capturing an image.

The captured image is stored by writing data in the auxiliary storage device 106. If an image is  
10 captured at the first image sensing time of the third preset position and at the first displacement angle, that image is saved as image data 10000-3-1-1; if an image is captured at the (k3)-th displacement angle, that image is saved as image data 10000-3-1-k3. On the  
15 other hand, when images are sensed at these angles and at the m-th image sensing time, they are saved as image data 10000-3-m-1 and 10000-3-m-3k. The video recording execution program 10114 has been explained.

The operation of the candidate edit program 10115  
20 in the fourth embodiment will be described below.

The flow of the candidate edit program is substantially the same as that in the first embodiment, and Fig. 4 and the flow chart in Fig. 8 will be explained below while substituting portions unique to  
25 the fourth embodiment. Figs. 24 and 25 respectively correspond to Figs. 4 and 8.

This process starts when a page candidate editor launches the page select program 10115.

If no image list page candidate is available, an image list page that displays a list of images at a specific time of the respective preset positions is generated on the basis of image data which have been sensed and stored. A candidate list page window 410 as a list of image list pages, which is used to select the newly generated image list page or to select an object to be edited from existing image list pages, is generated and displayed (step S19801).

If one candidate to be edited is selected, a change image select window 411 that shows the selected image list page as page plan 1 is displayed (step S19802). In this case, the image list page 401 generated by the system is used as page plan 1, and images 10000-1-1-0, 10000-2-1-0, 10000-3-1-0, and 10000-4-1-0 sensed at the first timing of the respective preset position are used.

If an end button has been pressed, the flow advances to step S19806. If one of the displayed images is selected, the flow advances to step S19805.

In step S19805, a substitute image select window 10401 (Fig. 26) which displays images at displacement angle positions of the preset position of the selected image, and images obtained at other image sensing times

of the corresponding preset position and displacement angle positions as substitute candidates is displayed.

The select window 10401 displays images of all image sensing times and displacement angle positions associated with that preset position. When the page candidate editor selects an optimal image from those images, the change image select window 413 is displayed again (S19802). In this case, the image selected in step S19804 is substituted by the image selected in step S19805.

Upon depression of the end button after the aforementioned substitute process is repeated an arbitrary number of times, the flow advances to step S19806 to generate a new image list page based on the substituted images. In this case, page plan 2 as the second page plan is generated, and its page plan data 402 is saved in the auxiliary storage device 106. Furthermore, the new page plan is added to the candidate list in step S19807.

The operation of the candidate edit program 10115 has been explained. The subsequent operation is the same as that of the page select program 116 of the first embodiment.

According to the fourth embodiment, since images can be sensed not only at camera angles which are set in advance but also at nearby angles and be stored



automatically or by some additional setups, even when the object position is not completely fixed, an optimal image can be selected or substituted.

As described above, even when the display  
5 position or the dish size varies, if some setups for image sensing within their change ranges are prepared, images that allow these changes can be sensed, and an image page which has an image of the target object falling within the field of view can be easily created.  
10 [Fifth Embodiment]

In the fifth embodiment, the candidate edit program 10115 in the fourth embodiment is replaced by a program unique to this embodiment. Since other arrangements are the same as those in the fourth  
15 embodiment, a detailed description thereof will be omitted.

The operation of the candidate edit program will be explained below using Figs. 27 and 28. The candidate edit program (not shown) as a characteristic  
20 feature of the fifth embodiment is stored on the memory 101 like the program 10115 in the fourth embodiment, and is launched by the page candidate editor.

A candidate page select window 10501 is displayed (step S10601). The candidate page select window has an  
25 area 10511 for inputting a candidate time, and an area 10512 for selecting a candidate from an existing

candidate list. When the candidate edit program is launched for the first time in a series of processes, no existing candidate list is displayed since it is not available yet.

5           If a candidate page to be edited is input as a candidate time, the flow advances to step S10603; if a candidate page is selected from the existing list, the flow advances to step S10604 (S10602).

10           In step S10603, image data stored in the auxiliary storage device 106 are searched for preset angle images sensed at the designated time to generate a candidate page to be edited.

15           In step S10604, a candidate page 10502 which is generated in the previous step or is selected is displayed. If an end button has been pressed, the flow advances to step S10609; if one of the displayed images is selected, the flow advances to step S10607 (steps S10605 and S10606).

20           In step S10607, a displacement angle substitute image select window 10503 that displays images at displacement angle positions of the image sensing time of the selected image as substitute candidates is displayed. The page candidate editor compares images at the preset positions with those at displacement  
25   angle positions, and selects an optimal image. When

the editor has pressed an end button 10531, the displacement angle substitute process ends.

Subsequently, a different time substitute image select window 10504 that displays images at other image  
5 sensing times at the displacement angle position selected in the immediately preceding step S10607 as substitute candidates is displayed in step S10608. The page candidate editor compares the image at the image sensing time selected in step S10602 with images at  
10 other image sensing times, and selects an optimal image. When the editor has pressed an end button 10431, the different time substitute process ends, and the change image select window 10502 is displayed again (S10604). In this case, the image selected in step S10607 is  
15 substituted by the image selected in step S10608.

Upon depression of the end button after the aforementioned substitute processes are repeated an arbitrary number of times, the flow advances to step S10609 to generate a new image list page based on the  
20 substituted images and store it in the auxiliary storage device 106. Furthermore, the new page plan is added to the candidate list in step S10610, thus ending the operation of the program.

The aforementioned operations of the candidate  
25 edit program 18115 from the page editor's view can be summarized as follows.

When the candidate edit program is launched, the page editor selects a candidate edit page. When an existing candidate page created by another page editor or by himself or herself previously is to be edited, 5 the editor selects the page from the existing candidate page list. In order to create a new candidate page, the editor sets an image sensing time on the basis of knowledge about an object to be sensed (in the example of a cafeteria menu, a cafeteria opening time or the 10 like), a time at which a candidate page is satisfactorily obtained and which is obtained from candidate edit experiences so far, and the like, thus creating and displaying the candidate page.

The editor determines an image to be substituted 15 from those of the respective preset angle positions on the candidate page, and selects that image (angle). Then, since a list of displacement images which have pan, tilt, and zoom angles slightly different from those of the selected image is displayed, the editor 20 selects an image of an optimal, and substitutes the selected image by the selected displacement angle image.

Furthermore, a list of images at other image sensing times of that displacement angle is displayed. The editor similarly selects an image at an optimal 25 time, and substitutes the selected image with the image of the selected image sensing time. In this manner,

the image substitute process for one preset angle is complete.

If other present angle images are required to be substituted, the editor repeats the aforementioned  
5 process. Upon completion of all substitutions, the editor presses the end button on the change image select window, thus ending the candidate page edit process.

According to the fifth embodiment, upon  
10 substituting each preset position image, a different image sensing time image can be selected after a displacement angle position image is selected, and when many displacement angle position images and different image sensing time images are available, a substitute  
15 image can be easily selected.

In the description of the fifth embodiment, after the displacement angle substitute process is done, the different time substitute process is done.  
Alternatively, this processing order may be replaced,  
20 i.e., a displacement angle image may be selected after a different time image is selected.

For example, in the example of the cafeteria menu, it is nonsense to determine the displacement angle using an image before a sample is set. In such case,  
25 it is better to select an optimal image after a sample is set from a list of different time images, and to

determine the displacement angle in correspondence with the position where the sample is set.

Even when an object to be sensed is an animal as in an example of a pet shop or the like, and is moving, 5 an image is selected first using the time, and is preferably finely adjusted using displacement angles.

By contrast, in case of a preset angle with a large zoom ratio, the object may often fall outside the image sensing range when the pan or title value 10 deviates even slightly. In such case, it is preferable that the displacement angle substitute process be done first like in the description of this embodiment. [Sixth Embodiment]

In the sixth embodiment, the video recording 15 execution program and candidate edit program in the fifth embodiment are replaced by ones unique to the sixth embodiment. Since other arrangements are the same as those in the fifth embodiment, a detailed description thereof will be omitted.

20 The operations of the video recording execution program and candidate edit program as characteristic features of the sixth embodiment will be described below with reference to Fig. 29.

The video recording execution program resides on 25 the memory 101, and is called by the OS at the time designated by the operation setup program. The basic

operation is the same as that of the video recording execution program in Fig. 23, but step S17303 as an overall image capture/save process unique to this embodiment is inserted between steps S10302 and S10303.

5           In step S17303, a camera angle at which the respective preset positions can be sensed simultaneously is computed from the setup data read in step S10301, and a predetermined command for capturing an image at that angle is sent to the camera 111 to  
10       control the camera, thus capturing an image. The captured image is stored by writing its data in the auxiliary storage device 106. Note that the respective positions cannot be simultaneously sensed depending on preset positions and the angle performance of the  
15       camera. In such case, partial images may be sensed in a plurality of image sensing processes, and may be composited to obtain the overall image to be stored. Since the subsequent processes are the same as in Fig. 23, a description thereof will be omitted.

20           The operation of the candidate edit program as a characteristic feature of the sixth embodiment will be explained below with reference to Figs. 30 and 31.

          The candidate edit program resides on the memory 101, and is launched by the page candidate editor. The  
25       basic operation is the same as that in Fig. 28 mentioned above, but steps S10601, S10602, and S10603

in Fig. 28 are respectively replaced by candidate page  
select window display process step S16601, candidate  
page display select/input process step S16602, and  
candidate page creation step S16603 unique to the sixth  
5 embodiment.

A candidate page select window 10701 is displayed  
(step S16601). The candidate page select window 10701  
has an area 10711 for displaying/selecting the overall  
image, and an area 10712 for selecting a candidate from  
10 an existing candidate list. When the candidate edit  
program is launched for the first time in a series of  
processes, no existing candidate list is displayed  
since it is not available yet. The overall image area  
10711 time-serially displays the overall images sensed  
15 and stored in step S17303 by the video recording  
execution program.

If a candidate page to be edited is selected as  
the overall image, the flow advances to step S16603; if  
it is selected from the existing list, the flow  
20 advances to step S10604 (S16602).

In step S16603, image data stored in the  
auxiliary storage device 106 are searched for preset  
angle images sensed at the image sensing time of the  
designated overall image, thus creating a candidate  
25 page to be edited.



The subsequent operations are the same as those of the candidate edit program of the fifth embodiment.

The operations of the candidate edit program of the sixth embodiment from the page editor's view can be summarized as follows.

When the candidate edit program is launched, the page editor selects a candidate edit page. When an existing candidate page created by another page editor or by himself or herself previously is to be edited, the editor selects the page from the existing candidate page list. In order to create a new candidate page, the editor selects an image which has satisfactorily captured respective preset angles as a whole from the overall images which are displayed time-serially, thus creating and displaying a candidate page.

In the example of a cafeteria menu, when the editor begins to edit by selecting an image in which fewer persons stand in front of a display case from the overall images obtained by sensing the entire display case, operations for substituting images by those at times without any persons standing in front of the case in units of preset angles can be reduced.

According to this embodiment, a candidate page to be edited can be visually selected while observing the overall image in place of the time, thus allowing quick edit.

[Seventh Embodiment]

The seventh embodiment will be described below.  
When the position of the object to be sensed varies,  
for example, when the number of menu items, the number  
5 of dishes, and the like vary day by day in a menu  
display case of a cafeteria although "shelves" of the  
display case are fixed in position, the object to be  
sensed may be set at a position different from the  
image sensing position which has been predicted and set  
10 in advance.

In such case, when some image sensing positions  
are set like in the first embodiment, the set positions  
undergo automatic interpolation, and image sensing and  
video recording are also done at the positions obtained  
15 by interpolation to solve the aforementioned problem.

Various interpolation methods are available. For  
example, a portion between the set image sensing  
positions is divided into a designated number of  
positions, and these divided positions can be added to  
20 the image sensing positions.

An example of an interface obtained by modifying  
the interface used to set a plurality of preset  
positions upon operation setups in the first embodiment  
will be explained below. Fig. 32 shows the interface  
25 obtained by adding numerical value input fields (201-01  
to 201-04) between neighboring preset numbers of the

image position setup area in Fig. 3 of the first  
embodiment. Points obtained by evenly dividing setup  
values of preset positions on two sides of a given  
field by a numerical value (positive integer) input to  
5 that field are registered as image sensing positions.

In the aforementioned interpolation method, when  
image sensing positions are set at the two ends of a  
given shelf, and the portion between these positions is  
divided into an arbitrary number of positions, images  
10 of one shelf can be evenly sensed.

Upon editing a candidate page, a list need not  
always be created using all images at the interpolated  
positions. When the change over time in position of  
the object to be sensed is not so large, a plurality of  
15 positions at which images of the object to be sensed  
can be sensed can be selected at appropriate time  
intervals to create a source candidate page. In the  
subsequent edit work, it suffices to substitute images  
at the respective positions by those sensed at  
20 different image sensing times by fixing the selected  
positions.

Fig. 33 and the flow chart in Fig. 34 show this  
state.

In step S203-1 of the flow chart, all images at  
25 all image sensing positions (including the set  
positions and interpolated positions) at a

predetermined time determined (details of the determination process will be omitted) based on an image sensing time list or input are displayed. A window 202-1 in Fig. 33 is an example when images (15 images) at all the image sensing positions at 11:35 are displayed. From these images, a plurality of images including the object to be sensed are selected using the pointing device 108 (step S203-04). The selected images are highlighted, and are registered in a selection list (step S203-05). Note that selection/non-selection is toggled every time the pointing device is operated.

Upon completion of selection of all images at image sensing positions including the desired object to be sensed, the operator selects a "create" button on the window 202-1 in Fig. 33 (step S203-02) to create an initial candidate page (step S203-06), thus ending the process.

When the operator wants to interrupt the process, he or she can select a "cancel" button (step S203-03) to discard the selection list as work data (step S203-07), thus ending the process.

In the example shown in Fig. 33, six image sensing positions are selected from 15 positions, and an initial candidate page 202-02 is generated.

In this embodiment, when a large number of image sensing positions are obtained by interpolation, images displayed for the purpose of selection cannot fall within one window. In such case, the select window  
5 202-1 is divided into a plurality of windows, and a button or pull-down menu for selecting one of these windows can be added.

When the image sensing positions are separately set on a plurality of shelves, this embodiment can be  
10 implemented as follows. That is, "0" is input to one of the numerical value input fields 201-01 to 201-04 each indicating the number of divisions in Fig. 32 to indicate the boundary of the shelves.

For example, when "0" is input to the field  
15 201-03 and values other than zero are input to other fields, preset positions 1, 2, and 3 are handled as those on the first shelf, and preset positions 4 and 5 are handled as those on the second shelf. In the flow of the processes in this case, steps S203-01 to S203-05  
20 in the flow chart in Fig. 34 are repeated for each shelf, and upon completion of selection on all the shelves, an initial candidate page is created in step S203-06.

When selection is allowed in units of shelves in  
25 this manner, even when the number of menu items is large, each single selection range can be narrowed down,

thus allowing easy operation and reducing selection errors.

[Eighth Embodiment]

In the seventh embodiment, the method of creating  
5 an initial candidate page using images at the  
interpolated image sensing positions has been explained.  
Upon editing a page candidate of the first embodiment,  
or after an initial candidate page is created in the  
seventh embodiment, the configuration (the number and  
10 order of images) of that page is often required to be  
changed. An embodiment that allows such change will be  
described using Fig. 35 and the flow chart in Fig. 36.

Fig. 35 shows a modification of Fig. 4 (the flow  
of image edit processes) in the first embodiment, and  
15 common numbers are used for the same functional  
portions for the sake of simplicity.

Fig. 36 shows a modification of the main flow of  
the candidate edit program in Fig. 8, and uses common  
numbers for portions having the same functions.

In Fig. 36, a candidate page selected from the  
20 candidate list is displayed on a window 250-01 in  
Fig. 35. In the first embodiment (Fig. 4), only change  
(substitute) operation of a target image is taken into  
consideration. However, delete, insert, and add  
25 buttons are added on the window 250-01 shown in Fig. 35  
in addition to the change button. The process for

changing the configuration of the candidate page using these buttons will be explained below using the flow chart in Fig. 36.

In step S251-01, which is different from Fig. 8, 5 delete operation is made. If the delete button has been pressed while a given image is selected, a delete process is executed in step S251-02 to delete the selected image from the image link structure.

If it is determined in step S251-03 that the 10 change button has been pressed while a given image is selected, a substitute image select process (step S251-04) is executed. This process is the same as that in step S805 in Fig. 8.

If the insert button (step S251-05) or the add 15 button (step S251-07) is selected while a given image is selected, a window 250-02 for selecting image sensing positions (angles) in Fig. 35 is displayed. Upon selection of an image of desired angles from the displayed angles, that image is inserted at the 20 designated position (before the image selected on the window 250-01 upon depression of the insert button; after the image upon depression of the add button) of the candidate page.

Fig. 35 shows the flow in which an image 5-1 is 25 added after an image 2-1 on the window 250-01.

We often want to cancel these processes in the middle of them, but that process is not particularly shown.

The delete process can be executed even when a  
5 plurality of images are selected, but the change, insert, and add processes (steps S251-04, S251-06, and S251-08) are canceled without any process when a plurality of images are selected.

As described above, according to the eighth  
10 embodiment, when the page candidate is to be edited in the first embodiment or after the initial candidate page is created even in the seventh embodiment, its configuration (the number and order of images) can be changed.

15 Note that the present invention may be applied to either a system including a plurality of devices or an apparatus consisting of a single device.

To recapitulate, according to the fourth to eighth embodiments, an image page can be created by  
20 selecting only appropriate sensed images in units of positions, thus greatly reducing the load of the edit work.

By selecting a substitute sensed image for only a position which is required to be changed on the image  
25 page automatically created by the system, the image page can be modified. Hence, an image of a given



position where the image is not sensed satisfactorily  
need only be changed, thus further reducing the load of  
the edit work.

Furthermore, a plurality of volunteers can create  
5 some image page candidates, and by only selecting one  
of a plurality of created image page candidates, the  
image page can be uploaded to and published on the WWW  
server, thus further reducing running cost.

Also, since images with more appropriate angles  
10 can be selected in units of positions without manually  
acquiring them, the load of the edit work can be  
reduced, and an image page can be created using more  
preferred images.

Moreover, the image sensing time of an image list  
15 page from which the edit work is to start can be  
selected by knowledge and experiences, and the edit  
work can be simplified.

Also, the edit work can be done while  
independently considering the time and angle, and when  
20 a large number of images are stored, images at  
appropriate times and angles can be selected more  
easily.

The image sensing time of an image page from  
which the edit work is to start can be selected using  
25 an image with which respective positions can be grasped  
as a whole, thus simplifying the edit work.

As described above, an image to be included in a document which is submitted on the network can be easily updated, and the image to be sensed can fall within the view field the operator intended without accurately designating the image sensing position.

[Ninth Embodiment]

In the first embodiment, an image page is published when the approver has approved that page. However, the present invention is not limited to this.

In the ninth embodiment, when a given candidate page has not been approved after a predetermined time has passed, that page is automatically approved. In this way, the page can be prevented from being not published even after a predetermined time has passed, thus reducing the running cost.

The ninth embodiment will be described in detail below.

The system arrangement is substantially the same as the camera server diagram shown in Fig. 1, except that the operation setup program 113 and page select program 116 in Fig. 1 are respectively replaced by an operation setup program 30113 and page select program 30116, as shown in Fig. 37.

The operation of this embodiment will be described in detail below.

Fig. 38 shows an example of operation setups of the operation setup program 30113, and the operation setups will be explained below using Fig. 38.

Fig. 38 shows the interface to which a field  
5 30000 is added to that shown in Fig. 3 of the first embodiment to allow input of an automatic select time.

The flow of the operation of the operation setup program 30113 is substantially the same as that shown in Fig. 6 of the first embodiment, except that the  
10 existing setups and automatic select time are read in step S601', and a setup page and automatic select time are displayed in step S602', as shown in Fig. 39.

The operations of the video recording execution program 114 and candidate edit program 115 are the same  
15 as those in the first embodiment.

The flow of the operation of the page select program 30116 will be described below with reference to the flow chart in Fig. 40.

The page select program is launched by the  
20 approver or when a predetermined automatic select time has been reached.

The processes in steps S30103 to S30106 in Fig. 40 are the same as those in steps S901 to S904 in Fig. 9 of the first embodiment.

25 If it is determined in step S30101 that the program has been launched at the automatic select time,

image candidate page plan 1 created by the same process as in step S801 of the candidate edit program 115 is approved in step S30102.

The approved page is uploaded in step S30107  
5 which is the same as step S905 in Fig. 9 of the first embodiment.

If it is determined in step S30101 that the program has been launched not at the automatic select time but by the approver, the flow advances to a  
10 password authentication process in step S30103. The subsequent processes are the same as those in Fig. 9. After the page is uploaded in step S30107 as in step S905 in Fig. 9 of the first embodiment, the automatic select time setup is cleared.

15 In place of clearing the automatic select time, information indicating that the page has been approved may be provided in step S30107, and if the page has been approved, it is not uploaded at that time (until the predetermined time has been reached).

20 In this manner, when the approver does not approve the page before a predetermined automatic select time is reached, image candidate page plan 1 is automatically created and uploaded, thus preventing the page from being not published even after the  
25 predetermined time has been reached, and reducing the running cost. Note that even the page which has been

approved by the approver may not be uploaded before the predetermined time is reached. In this case, the approver can set an arbitrary upload timing, and it is convenient for the approver.

5 [10th Embodiment]

In the ninth embodiment, an image candidate page is automatically and unconditionally approved when it has not been approved before a predetermined time. However, the present invention is not limited to such  
10 specific embodiment.

In the 10th embodiment, when no approval is done even after the predetermined time has passed, an appropriate page is selected from candidate pages, and the selected page is automatically approved.

15 In this manner, the page can be prevented from being not published even after the predetermined time has passed, and an appropriate one of candidate pages selected by volunteers can be published, thus reducing the running cost.

20 Details of the 10th embodiment will be explained below.

The system arrangement is substantially the same as that of the camera server in the ninth embodiment, except that the candidate edit program 115 and page  
25 select program 30116 of the ninth embodiment are respectively replaced by a candidate edit program 31115

and page select program 31116, as shown in Fig. 41. Also, a candidate importance list 31000 is added to the contents of the HD 106 in the camera server shown in Fig. 1 of the first embodiment.

5           The operation of the 10th embodiment with the above arrangement will be described in detail below.

          The operation of the operation setup program 30113 is the same as that in the ninth embodiment. Also, the operation of the video recording execution  
10       program 114 is the same as that in the first or ninth embodiment.

          In the flow of the operation of the candidate edit program 31115, a candidate importance list update process in step S31008 is added to the flow chart in  
15       Fig. 8 of the first embodiment, as shown in Fig. 42. Steps S31001 to S31007 in Fig. 42 are the same as steps S801 to S807 in Fig. 8, respectively.

          In the operation, after the candidate list is updated in step S31007, a candidate importance list is  
20       updated in step S31008, thus ending the candidate edit program 31115.

          Fig. 43 shows an example of the candidate importance list 31000 in step S31008.

          This list saves the edit history indicating the  
25       source candidate page of a given candidate page that has been edited.

The importance list 31000 holds:

"candidate page plan 1:" for automatically  
generated candidate page plan 1;

"candidate page plan 2: candidate page plan 1 →"  
5 for candidate page plan 2 modified based on candidate  
page plan 1;

"candidate page plan 3: candidate page plan 1 →  
candidate page plan 2" for candidate page plan 3  
modified based on candidate page plan 2;

10 "candidate page plan 4: candidate page plan 1 →  
candidate page plan 2 → candidate page plan 3" for  
candidate page plan 4 modified based on candidate page  
plan 3; and

"candidate page plan 5: candidate page plan 1 →  
15 candidate page plan 2" for another candidate page plan  
5 modified based on candidate page plan 2.

In the candidate importance list update process  
in step S31008, a process for updating the candidate  
importance list 31000 and saving the edit histories is  
20 done.

The flow of the operation of the page select  
program 31116 will be explained below using the flow  
chart in Fig. 44.

The processes in steps S31201 and S31203 to  
25 S31207 are the same as those in steps S30101 and S30103  
to S30107 of Fig. 40 in the ninth embodiment. In the

flow chart in Fig. 44, step S30102 in the flow chart in Fig. 40 is replaced by step S31202.

The page select program is launched by the approver or when a predetermined automatic select time  
5 has been reached.

If it is determined in step S31201 that the program has been launched at the automatic select time, the flow advances to step S31202 to approve, as a page plan with a high importance level, e.g., candidate page  
10 plan 3 having the longest edit history in the candidate importance list 31000 created in step S31008 of the candidate edit program 31115.

As in step S30107 in Fig. 40 of the ninth embodiment, the page is uploaded in step S31207.

15 In this manner, when the approver does not approve the page before a predetermined automatic select time is reached, a page plan that has been best edited of candidate page plans edited by volunteers is updated, thus preventing the page from being not  
20 published even after the predetermined time has passed, and reducing the running cost.  
[11th Embodiment]

In the 10th embodiment, the importance list holds edit histories. However, the present invention is not  
25 limited to such specific embodiment.



In the 11th embodiment, when a page is not approved even after a predetermined time has passed, an appropriate one of candidate pages is selected based on its record of the number of times of edit and edit time, and is automatically approved. In this manner, the page can be prevented from being not published even after the predetermined time has passed, and an appropriate one of candidate pages selected by volunteers can be published, thus reducing the running cost.

Details of the 11th embodiment will be described below.

The system arrangement is substantially the same as that of the camera server of the 10th embodiment, except that the candidate edit program 31115 and page select program 31116 in the 10th embodiment are respectively replaced by a candidate edit program 32115 and page select program 32116, as shown in Fig. 45. Also, the candidate importance list 31000 in the HD 106 in the camera server of the 10th embodiment is replaced by a list 32000.

The operation of the 11th embodiment with the above arrangement will be described in detail below.

The operation of the operation setup program 30113 is the same as that in the 10th embodiment. Also,

the operation of the video recording execution program 114 is the same as that in the first or 10th embodiment.

The flow of the operation of the candidate edit program 32115 is not shown since it is modified to  
5 apply the candidate importance list update process in step S31008 in the flow chart of Fig. 42 of the 10th embodiment to the 11th embodiment.

Fig. 46 shows an example of the candidate importance list 32000 in the 11th embodiment. As shown  
10 in Fig. 46, the 11th embodiment saves the number of times of edit and the last update time of each candidate page.

The importance list 32000 holds:

"candidate page plan 1: zero times, 11:20" for  
15 automatically generated candidate page plan 1;

"candidate page plan 2: once, 11:25" for  
candidate page plan 2 modified based on candidate page plan 1;

"candidate page plan 3: twice, 11:30" for  
20 candidate page plan 3 modified based on candidate page plan 2;

"candidate page plan 4: three times, 11:55" for  
candidate page plan 4 modified based on candidate page plan 3;

"candidate page plan 5: twice, 11:40" for another candidate page plan 5 modified based on candidate page plan 2; and

"candidate page plan 6: three times, 11:45" for  
5 candidate page plan 6 modified based on candidate page plan 5.

That is, a process for updating the candidate importance list 32000 by holding the candidate importance level of a new candidate page, the number of  
10 times of modification of which is obtained by incrementing that of the source candidate page, and the edit time of which is saved is done in the same step as step S31008 of Fig. 42.

The flow of the operation of the page select  
15 program 32116 is not shown since a process for checking the importance level in step S31202 in the flow chart of Fig. 44 is applied to the 11th embodiment. In this step, page plan 3 which has a large number of times of edit and the latest update time in the candidate  
20 importance list 32000 created by the candidate edit program 32115 and shown in Fig. 46 is approved as a page plan with a high importance level.

That is, since a volunteer who could edit based on candidate page 6 present at 11:45 created candidate  
25 page 4 at 11:55, it is determined that page 4 has

higher importance level than page 6 although they have been modified the same number of times.

In this manner, when the approver does not approve the page before a predetermined automatic  
5 select time is reached, a page plan that has been edited by a volunteer who can use the most candidate page plans of those edited by volunteers is approved, thus preventing the page from being not published even after the predetermined time has passed, uploading a  
10 satisfactory image page, and reducing the running cost. [12th Embodiment]

In the 10th and 11th embodiments, the edit record is used as an importance. However, the present invention is not limited to such specific embodiments.

15 In the 12th embodiment, a candidate page which has been supported without being edited, i.e., without requiring any change, is recorded, and when a page has not been approved after a predetermined time, an appropriate one of candidate pages is selected on the  
20 basis of the record of the number of times of edit, edit time, and support without edit, and is automatically approved.

In this manner, the page can be prevented from being not published even after a predetermined time has  
25 passed, thus reducing the running cost.

Details of the 12th embodiment will be explained below. The system arrangement is substantially the same as that of the camera server of the 11th embodiment, except that the candidate edit program 5 32115 and page select program 32116 in the 11th embodiment are respectively replaced by a candidate edit program 33115 and page select program 33116, as shown in Fig. 47. Also, the candidate importance list 32000 in the HD 106 of the camera server of the 11th 10 embodiment is replaced by a candidate importance list 33000.

The operation of the 12th embodiment will be described in detail below.

Note that the operation of the operation setup 15 program 30113 is the same as that in the 11th embodiment. Also, the operation of the video recording execution program 114 is the same as that in the first and 11th embodiment.

Fig. 48 shows an example of the flow of image 20 edit processes in the 12th embodiment. Reference numeral 33001 denotes a button which is used to support a candidate page, and can be indicated by a pointing device.

The flow of the operation of the candidate edit 25 program 33115 is substantially the same as that in Fig. 42 of the 10th embodiment, except that step S33109

of supporting a page is added, and a candidate importance list update process in step S33108 equivalent to step S31008 is modified, as shown in Fig. 48. Also, steps S33101 to S33017 are respectively  
5 the same as steps S30101 to S30107 in Fig. 40.

When a candidate page is displayed in step S33102, if the operator has pressed the support button 33001 in Fig. 48 in step S33109, the number of times of support in the candidate importance list 33000 is incremented  
10 by 1 in step S33108 to update the list 33000, thus ending the process.

If the support button is not pressed, the flow advances to step S33103, which is equivalent to step S31003.

15 Fig. 50 shows an example of the candidate importance list 33000 updated in step S33108.

This list saves the number of times of edit, the last update time, and the number of times of support of each candidate page.

20 The important list 33000 holds:

"candidate page plan 1: zero times, 11:20, once"  
for automatically generated candidate page plan 1;

"candidate page plan 2: once, 11:25, three times"  
for candidate page plan 2 modified based on candidate  
25 page plan 1;

"candidate page plan 3: twice, 11:30, once" for candidate page plan 3 modified based on candidate page plan 2;

"candidate page plan 4: three times, 11:55, zero times" for candidate page plan 4 modified based on candidate page plan 3;

"candidate page plan 5: twice, 11:40, zero times" for another candidate page plan 5 modified based on candidate page plan 2; and

10 "candidate page plan 6: three times, 11:45, once" for candidate page plan 6 modified based on candidate page plan 5.

That is, a process for updating the candidate importance list 33000 by holding the candidate  
15 importance level of a new candidate page, the number of times of modification or the number of times of support of which is obtained by incrementing that of the source candidate page, and the edit time of which is saved is done in step S33108 which is equivalent to step S31008.

20 In the flow of the operation of the page select program 33116, the process for checking the importance level in step S31202 in the flow chart of Fig. 44 of the 10th embodiment is modified (not shown).

Page plan 6 which has the largest sum of the  
25 number of times of edit and the number of times of support and has the latest update time in the candidate

importance list 33000 created by the candidate edit program 33115 and shown in Fig. 50 is approved as a page plan with a high importance level.

That is, for example, both candidate page plan 2  
5 having the number of times of edit = 1, and candidate page plan 6 having the number of times of edit = 3 have a sum of the numbers of times of edit and support = 4, and their importance levels are equivalent. In this case, it may be determined that candidate page plan 6  
10 which has been updated later has higher importance level than page plan 2.

In this manner, when the approver does not approve the page before a predetermined automatic select time is reached, a page plan which has been  
15 edited by a volunteer who can use the most candidate page plans, and which is supported without edit by many volunteers, of those edited by volunteers is approved, thus preventing the page from being not published even after the predetermined time has passed, uploading a  
20 satisfactory image page, and reducing the running cost.  
[13th Embodiment]

In the 10th to 12th embodiments, the edit or support record of a candidate page is used as the importance level. However, the present invention is  
25 not limited to such specific embodiments.





114 is the same as that of the first and 12th  
embodiments.

Fig. 52 shows an example of image edit processes  
in the 13th embodiment. In Fig. 52, reference numeral  
5 34002 denotes a button which is used to support a  
selected image without edit.

The flow of the operation of the candidate edit  
program 34115 is substantially the same as that in the  
flow chart of Fig. 49 in the 12th embodiment, except  
10 that the substitute image select/recording process in  
step S34105 and the candidate importance list update  
process in step S34108 in Fig. 49 are modified, as  
shown in Fig. 53.

Steps S34101 to S34104, S34106, and S34107 are  
15 respectively the same as steps S33101 to S33104, S33106,  
and S33107 in Fig. 49.

In step S34105 after image selection in step  
S34104, a substitute image select window 34412 with the  
image support button 34002 is displayed. If the button  
20 34002 has been pressed, the contents of the support  
field of the image of interest in the image importance  
list 34001 are counted up.

If another image is selected, the image of  
interest is substituted by that image, and the contents  
25 of the select field of the image of interest in the  
image importance list 34001 are counted up.

More specifically, as in step S33105 in Fig. 49 of the 12th embodiment, when an image is selected in the substitute image select/recording process in step S34105, the number of times of image selection in the image importance list 34001 is incremented by 1 to update the image importance list 34001.

On the other hand, if the support button 34002 has been pressed in the substitute image select/recording process in step S34105, the number of times of image support in the image importance list 34001 is incremented by 1 to update the image importance list 34001. The flow then returns to step S34102 to execute a candidate page display page.

Fig. 54 shows an example of the image importance list 34001 in the 13th embodiment. This list saves the number of times of selection or support without edit of each image.

That is, this list holds the numbers of times of selection and the numbers of times of support without edit of all image data 120-1-1, 120-2-1,... generated by the video recording execution program 114 in the form of a list.

Fig. 55 shows an example of the candidate importance list 34000 in step S34108. This list holds a score that computes the importance level of each candidate page from the image importance list 34001

created in step S34105 in addition to the contents of the candidate importance list 33000 in Fig. 49 of the 12th embodiment.

5 This score can be computed by summing up all the numbers of times of selection and support of individual images, for example, when candidate page plan 1 includes image data 120-1-1, 120-2-1, 120-3-1, and 120-4-1.

10 As for image data which has been neither selected nor supported, the importance level of a candidate page including that image data is set at zero, since volunteers have not edited that page.

15 In this case, only the score of the importance level computed from the image importance list 34001 may be set at zero.

Alternatively, as for image data which has been neither selected nor supported, a minus score may be given. For example, "1" is subtracted from the corresponding score to decrease the importance level of 20 a candidate page that includes the image data of interest.

In this case, the score to be subtracted is not limited to "1" but may be a predetermined score.

25 In the flow of the operation of the page select program 34116, the process for checking the importance

level in step S31202 in the flow chart of Fig. 44 of the 10th embodiment need only be modified.

In the candidate importance list 34000 created by the candidate edit program 34115 and shown in Fig. 55, candidate pages 2 and 6 have a sum of the numbers of times of edit and support = 4, and have an equivalent importance level. However, the sum of the numbers of times of edit and support, and the score of the image importance, is 10 for candidate page 2 and 11 for candidate page 6. Hence, it is concluded that candidate page 6 has higher importance level than page 2.

If the score remains the same, a page plan which has been edited latest is approved as that with high importance level.

That is, it is determined that candidate page plan 6 which has a largest sum of the number of times of edit + the number of times of support + the image importance score and has been updated latest has a highest importance level.

In another importance computation method, when candidate page 6 includes image data which is neither selected nor supported, and candidate page 2 does not include such image, it is determined that the volunteers do not consider all images of candidate page

6 and, hence, candidate page 2 has a higher importance level than candidate page 6.

In this case, as a minus image importance score may be given to an image which is not supported, the importance level of candidate page 6 including an image which is not edited is decreased, thus relatively increasing the importance level of candidate page 2 which has been edited more satisfactorily.

In this manner, when the approver does not approve the page before a predetermined automatic select time is reached, a page plan which has been edited by a volunteer who can use a largest number of candidate page plans, and which includes many images selected or supported upon creating a candidate page of those edited by volunteers is approved, thus preventing the page from being not published even after the predetermined time has passed, uploading a satisfactory image page, and reducing the running cost.

[14th Embodiment]

In the 10th to 13th embodiments, the importance level is used in automatic approval of a candidate page. However, the present invention is not limited to such specific embodiments.

In the 14th embodiment, the order of candidate pages in the candidate page list is changed depending on their importance level upon displaying the list.

In this way, upon creating a new image page based on a given candidate page, a candidate page to be used can be easily determined.

Details of the 14th embodiment will be explained  
5 below.

The system arrangement is substantially the same as that of the camera server of the 13th embodiment, except that the candidate edit program 34115 of the 13th embodiment is replaced by a candidate edit program  
10 35115, as shown in Fig. 56.

The operation of the 14th embodiment will be described in detail below. Note that the operation of the operation setup program 30113 is the same as that in the 13th embodiment. Also, the operation of the  
15 video recording execution program 114 is the same as that in the first embodiment and ninth to 13th embodiments. Furthermore, the operation of the page select program 34116 is the same as that in the 13th embodiment. Hence, a detailed description of these  
20 programs will be omitted.

Fig. 57 shows an example of the flow of image edit processes of the 14th embodiment. In Fig. 57, reference numeral 35000 denotes a window for displaying candidates in the order of their importance levels in  
25 the form of a list.

002240 003370 002240

The flow of the operation of the candidate edit program 35115 can be implemented by changing the candidate list display process in step S33101 in the flow chart of Fig. 49 in the 12th embodiment.

- 5           The flow of the operation of the candidate list display process will be explained below using the flow chart in Fig. 58.

When the candidate list display process starts, the candidates in the candidate list are sorted in step  
10 S35101 on the basis of the candidate importance list 34000 (Fig. 55) created in step S34108 in Fig. 53 of the 13th embodiment and the computation results of importance levels as in step S31202 in Fig. 44 of the 10th embodiment.

- 15           In step S35102, the candidate list is displayed.

In this way, the candidate list window 35000 used to select a page to be edited by the candidate edit program 35115 is displayed in the order of importance levels of the candidates, and it becomes easy to edit  
20 based on a more suitable candidate page, thus reducing the running cost.

In the above description, the importance level is computed for a partial modification in consideration of the number of times of edit and the number of times of  
25 support in the example in which images automatically sensed and stored by the camera are substituted.



Alternatively, a partial image may be selected from partial image candidates which are prepared by some method, as described above.

Furthermore, the above embodiment may be applied  
5 to a case wherein an image is segmented into partial images, which are to be modified.

In this case, a larger weight may be assigned to support than edit.

In the ninth to 14th embodiments described above,  
10 the processes in the camera server have been exemplified. In this case, the camera server may be either a system including a plurality of devices or an apparatus consisting of a single device.

To restate, according to the above embodiments, a  
15 preferred one of image pages created by volunteers is published, thus reducing the running cost.

Especially, in the ninth embodiment, when a page has not been approved after a predetermined time has passed, the page is automatically approved, thus  
20 publishing a candidate page, and reducing the running cost.

In the 10th embodiment, when the approver does not approve any page before the predetermined automatic select time has been reached, a page plan which has  
25 been best edited of candidate page plans edited by

002250 003200 003200

volunteers is uploaded, thus publishing a preferred image page, and reducing the running cost.

In the 11th embodiment, since a page plan which has been edited by a volunteer who can use a largest  
5 number of candidate pages is approved, a preferred image page can be published, thus reducing the running cost.

In the 12th embodiment, since a page plan which has been edited by a volunteer who can use a largest  
10 number of candidate pages and which is supported by many volunteers is approved, a preferred image page can be published, thus reducing the running cost.

In the 13th embodiment, since a candidate page plan which has been edited by a volunteer who can use a  
15 largest number of candidate pages and which is supported by many volunteers and includes many selected or supported images is approved, a preferred image page can be published, thus reducing the running cost.

Also, in the 13th embodiment since the importance  
20 level of a candidate page plan which includes an image which is not supported upon creating the candidate page is decreased, a more preferred image page can be published, thus reducing the running cost.

In the 14th embodiment, since the candidate list  
25 is displayed in the order of importance levels of candidates, it becomes easy to edit based on a more

preferred candidate page, thus publishing a preferred image page, and reducing the running cost.

When the above embodiment is applied to a case wherein a page or image is partially edited in place of  
5 selecting an image in units of angles, the score can be computed for the entire page while page or image parts are edited or even when an identical part is shared by a plurality of persons, a good image or page can be created in collaboration.

10 As described above, according to the ninth to 14th embodiment, an image to be included in a document which is submitted on the network can be easily updated, and can be automatically published on the network.

[15th Embodiment]

15 In the first embodiment, images are evenly displayed on a candidate page. However, the present invention is not limited to such specific embodiment.

The 15th embodiment will be described in detail below.

20 The system arrangement is substantially the same as that of the camera server in the first embodiment, except that the candidate edit program 115 in the first embodiment is replaced by a candidate edit program 40115, and a publication inhibition setup program 40117  
25 is added to the contents of the memory 101 in Fig. 1 of the first embodiment, as shown in Fig. 59.

The operations of the operation setup program 113, video recording execution program 114, and page select program 116 are the same as those in the first embodiment. Note that video recording data records  
5 information of image sensing positions and times.

Fig. 60 shows an example of the operation setups of the publication inhibition setup program 40117, and the flow of the publication inhibition setup program will be explained below using the flow chart in Fig. 61.  
10 The publication inhibition program is launched in response to an operator's request. Existing setup data (not shown) is read from the auxiliary storage device (step S41101), and a setup page window 41001 in Fig. 60 is displayed (step S41102). On this window,  
15 publication inhibition start and end times common to all the positions can be input in fields 41002 and 41003. In position-dependent setups, the publication inhibition start and end times of the first preset positions can be input in fields 41004 and 41005. Also,  
20 a publication inhibition position can be set in a field 41006 irrespective of time. Likewise, publication inhibition setups can be made for a maximum of five preset positions in the 15th embodiment. Of course, the number of positions may be increased. The setup  
25 input process in step S41104 repeats itself until a setup save button 41007 is pressed, and if it is

determined that the setup save button 41007 has been pressed (step S41103), the flow advances to step S41105.

In the setup input process in step S41104, data input to various fields are checked, and display of  
5 input data is changed. In the example of Fig. 60, the publication inhibition start and end times common to all the positions, and the publication inhibit time information of the first preset position are set. Also, since the fields for the fourth preset position have no  
10 time entry about time, and designate that the image is not to be published, an image at this position is not published irrespective of time in this setup.

In step S41105, pieces of displayed information are written in the auxiliary storage device. In the  
15 example in Fig. 60, setups indicating that images are not published from 10:00 to 10:10 for all the preset positions, and an image at the first preset position from 10:50 to 11:00 and all images at the fourth preset position are not published are saved.

In this embodiment, the publication inhibition  
20 setup program 40117 is launched in response to an operator's request. In this case, the video recording execution program 114 might have already been executed. When the publication inhibition positions and times are  
25 known in advance, if the publication inhibition setup program is called from the operation setup program upon

002250-002250  
execution of the operation setup program 113, this  
setup is reflected upon execution of the video  
recording execution program, and images at the  
publication inhibition positions or the publication

5 inhibition times can be prevented from being captured  
and stored. In this manner, the memory can be  
prevented from being wasted, and the running cost can  
be reduced. Also, the image sensing position or image  
sensing time need not be saved together with an image.  
10 The publication inhibition setup program has been  
explained.

Fig. 62 shows the flow of image edit processes.

In Fig. 62, a button 42001 is added to the  
interface shown in Fig. 4 of the first embodiment to  
15 allow to cancel image substitution.

The flow of the operation of the candidate edit  
program 40115 is as shown in Fig. 63, and is  
substantially the same as the flow chart of Fig. 8 of  
the first embodiment, except that a candidate page  
20 display process in step S42102, a substitute image  
select process in step S42105, a setup read process in  
step S42108, and a publication inhibited image check  
process in step S42109 are added to the head of the  
flow in this order.

25 Steps S42101, S42103, S42104, S42106, and S42107  
in Fig. 63 are respectively the same as steps S801,

S803, S804, S806, and S807 in Fig. 8 of the first embodiment.

A process executed when the button 42001 in Fig. 62 is clicked in step S42105 upon selecting an  
5 image in step S42104 so as to cancel image selection is added to step S805 in Fig. 8 of the first embodiment.

Fig. 64 shows an example of the contents of a publication list 42201 in the 15th embodiment.

In the setup read process in step S42108, setup  
10 data (stored in the HD 106) generated by the publication inhibition setup program 40117 is read to execute a publication inhibited image check process (step S42109). That is, it is checked based on the position and image sensing time if each image is  
15 inhibited from being published. If an image can be published, "OK" is stored in the corresponding field of the publication list; if an image is inhibited from being published, "NG" is stored.

In the candidate page display process in step  
20 S42102 and the substitute image select process in step S42105, publication inhibited images are displayed to be distinguished from other images on the basis of the publication inhibited image check process result. In the example shown in Fig. 62, publication inhibited  
25 images such as image 421-2-1 on the change image select window 411 and images 421-2-1 and 421-2-4 on the

substitute image select window 412 can be displayed to be easily distinguished from other images.

In the 15th embodiment, when publication inhibition conditions are set, publication inhibited  
5 images are emphasized upon displaying a candidate page. In this manner, whether or not each image can be published can be determined, thus improving the edit efficiency of an image list page.

Also, an image which should not be published  
10 inadvertently can be prevented from being uploaded. [16th Embodiment]

In the 10th to 14th embodiments, importance computations are made using edit or support records of a candidate page or select or support records of images.  
15 However, the present invention is not limited to such specific embodiments.

In the 16th embodiment, the priority of a candidate page is changed using publication inhibited image information.  
20 In this way, an image list page that includes a publication inhibited image can be prevented from being open to the public.

Details of the 16th embodiment will be explained below.

25 The system arrangement is substantially the same as that of the camera server of the 14th embodiment,



except that the candidate edit program 35115 and page  
select program 34116 of the 14th embodiment are  
respectively replaced by a candidate edit program  
43115 and page select program 43116, as shown in  
5 Fig. 65. Also, the candidate importance list 34001 in  
the HD 106 of the camera server of the 14th embodiment  
is replaced by an image importance list 44001.

The operations of the operation setup program  
30113 and video recording execution program 114 are the  
10 same as those in the 14th embodiment.

The operation of the 16th embodiment will be  
described in detail below.

The flow of the operation of the candidate edit  
program 43115 is substantially the same as the flow  
15 chart of Fig. 53 in the 13th embodiment, except that  
step S34105 is replaced by a substitute image  
select/recording process (step S44105), and a setup  
read process (step S44108) and a publication inhibited  
image check process (step S44109) are added to the head  
20 of the flow in this order, as shown in Fig. 66.

Fig. 67 shows an example of the image importance  
list 44001 in the 16th embodiment. In this list, a  
publication field is added to the image importance list  
34001.

25 Note that the setup read process (step S44108) is  
the same as that in the 15th embodiment, and the

publication inhibition process (step S44109) is also substantially the same as that in the 15th embodiment. In the process of the 15th embodiment, the list to be updated is the publication list 42201, but in the

5 publication inhibited image check process S44109 of the 16th embodiment, the image importance list 44001 is used. In both these processes, the contents of the publication field are updated.

Also, in the substitute image select/recording  
10 process (step S44105), the contents of the select and support fields are similarly updated, although the image importance list 44001 is used.

In the example shown in Fig. 67, an image 120-1-1 has a number of times of selection = 1 and a number of  
15 times of support = 1, and can be published. Likewise, an image 120-3-1 has a number of times of selection = 2 and a number of times of support = 0, and is inhibited from being published. Also, an image 120-1-2 has both numbers of times of selection and support = 0, and is  
20 inhibited from being published. In this example, "OK" or "NG" is recorded as publication information for the sake of simplicity. Alternatively, if "0" for OK or "-100" for NG is recorded, the importance level of each  
25 image can be computed from the image importance list. That is, the page select program 43116 implements substantially the same operations as in the 13th and

14th embodiments, except that a score as to whether an image is allowed to be published or not is added (subtracted).

In this fashion, an image page that satisfies the publication inhibition conditions is harder to select, thus improving the select efficiency.

[17th Embodiment]

In the 17th embodiment, a page upload process (see Fig. 3) in step S31207 in the page select program 34116 has different processing contents. Prior to page upload, whether or not an image at each position is inhibited from being published is checked with reference to the image importance list 44001. If the image of interest is inhibited from being published, it is substituted by a predetermined image. For example, the image of interest is substituted by an image of text "this image cannot be published" which is prepared in advance. After that, the page is uploaded. For example, when an image at the second position is inhibited from being published, a display like on a window 45001 in Fig. 68 is made.

In this manner, an image which is set to be inhibited from being published is not published even if it is picked up upon edit, thus allowing secure operation.

In the above example, an image is substituted by another image. Alternatively, a publication inhibited image may be simply deleted from the page to be uploaded.

5 Also, not only a publication inhibited image but also an image which is neither supported nor edited may be handled similarly.

In the first to 17th embodiments mentioned above, the processes in the camera server have been  
10 exemplified. In this case, the camera server may be either a system including a plurality of devices or an apparatus consisting of a single device.

The objects of the present invention are also achieved by supplying a storage medium (or recording  
15 medium), which records a program code of a software program that can implement the functions of the above-mentioned embodiments to the system or apparatus, and reading out and executing the program code stored in the storage medium by a computer (or a CPU or MPU)  
20 of the system or apparatus. In this case, the program code itself read out from the storage medium implements the functions of the above-mentioned embodiments, and the storage medium which stores the program code constitutes the present invention. The functions of  
25 the above-mentioned embodiments may be implemented not only by executing the readout program code by the

computer but also by some or all of actual processing operations executed by an OS (operating system) running on the computer on the basis of an instruction of the program code.

5 Furthermore, the functions of the above-mentioned embodiments may be implemented by some or all of actual processing operations executed by a CPU or the like arranged in a function extension board or a function extension unit, which is inserted in or connected to  
10 the computer, after the program code read out from the storage medium is written in a memory of the extension board or unit.

To recapitulate, according to the above embodiments, a preferred one of image pages created by  
15 volunteers is open to the public, thus reducing the running cost.

Especially, in the 15th embodiment, upon creating a candidate image list page, a publication inhibited image can be emphasized upon being displayed, thus  
20 greatly reducing the load of the edit work.

In the 16th embodiment, since the importance level of automatic selection of a candidate page on which an image at the inhibited position or time is selected is decreased, an image list page including a  
25 publication inhibited image can be prevented from being published.

In the 17th embodiment, when a candidate page is approved and is open to the public, a publication inhibited image is automatically substituted by a preferred image, thus improving the appearance of an  
5 image list page.

Furthermore, in the 17th embodiment when a candidate page is approved and is open to the public, a publication inhibited image is deleted, thus improving the appearance of an image list page. Also, even when  
10 a publication inhibited image is inadvertently picked up upon edit, it can be prevented from being published, thus improving security.

As described above, according to the 15th to 17th embodiments, an image to be included in a document  
15 which is submitted on the network can be easily updated, and an image which is sensed under a required image sensing condition can be set to be inhibited from being published.

As many apparently widely different embodiments  
20 of the present invention can be made without departing from the spirit and scope thereof, it is to be understood that the invention is not limited to the specific embodiments thereof except as defined in the appended claims.

WHAT IS CLAIMED IS:

1. An information processing apparatus for submitting document information including an image via a network, comprising:

5 image input means;  
schedule storage means for storing input schedule information of said image input means;  
image storage means for storing an image obtained in accordance with the schedule information; and  
10 document creation means for creating new document information by substituting an image in the document information by the image stored in said image storage means.

2. The apparatus according to claim 1, further  
15 comprising means for transferring the document information created by said document creation means to a network server.

3. The apparatus according to claim 1, further comprising designation means for designating an image  
20 in the old document information to be changed by an image newly stored in said image storage means.

4. The apparatus according to claim 3, further comprising display control means for displaying the changed image in a different pattern.

25 5. The apparatus according to claim 3, further comprising display control means for, when an image in

the document information is selected, displaying that image in a pattern different from other images.

6. The apparatus according to claim 1, further comprising means for storing an image prepared in advance, and substituting an image in the document information, which is not changed, by the image prepared in advance.

7. The apparatus according to claim 1, wherein the document information is HTML document information.

8. The apparatus according to claim 1, wherein the input schedule includes an image sensing position and time.

9. A method of controlling an information processing apparatus for submitting document information including an image via a network, comprising:

the step of storing input schedule information of predetermined image input means;

the step of storing an image obtained in accordance with the schedule information; and

the step of creating new document information by substituting an image in the document information by the image stored in said image storage means.

10. A storage medium that stores a computer program code for an information processing apparatus which

comprises image input means and submits document information including an image via a network, storing:



a program code of the step of storing input  
schedule information of predetermined image input  
means;

a program code of the step of storing an image  
5 obtained in accordance with the schedule information;  
and

a program code of the step of creating new  
document information by substituting an image in the  
document information by the image stored in said image  
10 storage means.

11. An information processing apparatus for updating  
an image in document information to be submitted via a  
network, comprising:

video input means capable of remote-controlling  
15 an image sensing position;

schedule storage means for storing schedule  
information having an image sensing position and time  
of said video input means;

control means for activating said video input  
20 means in accordance with the schedule information  
stored in said schedule storage means, and saving an  
obtained image in predetermined image storage means;  
and

document creation means for creating new document  
25 information by substituting an image at an image  
sensing position in old document information, which

corresponds to an image sensing position of an image stored in the image storage means, by that image.

12. The apparatus according to claim 11, further comprising means for transferring the document

5 information created by said document creation means to a network server.

13. The apparatus according to claim 11, further comprising designation means for designating an image in the old document information to be changed by an  
10 image newly stored in said image storage means.

14. The apparatus according to claim 13, further comprising display control means for displaying the changed image in a different pattern.

15. The apparatus according to claim 13, further comprising display control means for, when an image in the document information is selected, displaying that image in a pattern different from other images.

16. The apparatus according to claim 11, further comprising means for storing an image prepared in  
20 advance, and substituting an image in the document information, which is not changed, by the image prepared in advance.

17. The apparatus according to claim 11, wherein the document information is HTML document information.

25 18. A method of controlling an information processing apparatus which comprises video input means capable of

remote-controlling an image sensing position and makes the video input means capture an image in document information to be submitted via a network, comprising:

the step of storing schedule information having  
5 an image sensing position and time of the video input means;

the step of activating the video input means in accordance with the stored schedule information, and saving an obtained image in predetermined image storage  
10 means; and

the step of creating new document information by substituting an image at an image sensing position in old document information, which corresponds to an image sensing position of an image stored in the image  
15 storage means, by that image.

19. A storage medium that stores a computer program code for an information processing apparatus which comprises video input means capable of remote-controlling an image sensing position and makes  
20 the video input means capture an image in document information to be submitted via a network, storing:

a program code of the step of storing schedule information having an image sensing position and time of the video input means;

25 a program code of the step of activating the video input means in accordance with the stored

schedule information, and saving an obtained image in predetermined image storage means; and

a program code of the step of creating new document information by substituting an image at an  
5 image sensing position in old document information, which corresponds to an image sensing position of an image stored in the image storage means, by that image.

20. An information processing apparatus for submitting document information including an image via  
10 a network, comprising:

image input means;

schedule input means for inputting schedule information pertaining to image capture of said image input means;

15 correction means for correcting the schedule information input by said schedule input means;

image storage means for storing an image obtained in accordance with new schedule information corrected by said correction means; and

20 document creation means for creating document information on the basis of an image stored in said image storage means.

21. The apparatus according to claim 20, further comprising means for transferring the document

25 information created by said document creation means to a network server.

22. The apparatus according to claim 20, wherein said correction means computes new image sensing positions by varying one image sensing position in the schedule information within a predetermined range around that image sensing position as a center.

23. The apparatus according to claim 20, wherein said correction means includes means for generating a new position that interpolates between two positions of said image input means.

24. The apparatus according to claim 20, further comprising edit means for deleting, inserting, and adding an image in the document information created by said document creation means.

25. The apparatus according to claim 20, further comprising means for displaying and selecting displacement images so as to select an image to be included in a document.

26. The apparatus according to claim 20, further comprising means for sensing an image over a broad range and storing the sensed image in image recording means when image sensing is done on the basis of the schedule information.

27. The apparatus according to claim 20, wherein the document information is HTML document information.

28. A method of controlling an information processing apparatus which has image input means and submits

document information including an image via a network,  
comprising:

the input step of inputting schedule information  
pertaining to image capture of the image input means;

5 the correction step of correcting the input  
schedule information;

the storage step of storing an image obtained in  
accordance with corrected, new schedule information;  
and

10 the document creation step of creating document  
information on the basis of the stored image.

29. A storage medium that stores a program code for  
an information processing apparatus which has image  
input means and submits document information including

15 an image via a network, storing:

a program code of the input step of inputting  
schedule information pertaining to image capture of the  
image input means;

a program code of the correction step of  
20 correcting the input schedule information;

a program code of the storage step of storing an  
image obtained in accordance with corrected, new  
schedule information; and

a program code of the document creation step of  
25 creating document information on the basis of the  
stored image.

30. An information processing apparatus for updating an image in document information to be submitted via a network, comprising:

video input means capable of remote-controlling  
5 an image sensing position;

schedule storage means for storing schedule information having an image sensing position and time of said video input means;

computation means for computing a plurality of  
10 new image sensing positions on the basis of an image sensing position in the schedule information stored in said schedule storage means;

control means for activating said video input means in accordance with the new image sensing position  
15 computed by said computation means and the image sensing time, and saving an obtained image in predetermined image storage means; and

document creation means for creating document information on the basis of the image stored in the  
20 image storage means.

31. The apparatus according to claim 30, further comprising means for transferring the document information created by said document creation means to a network server.

25 32. The apparatus according to claim 30, wherein said computation means computes new image sensing positions

within a predetermined range having one image sensing position as a center.

33. The apparatus according to claim 32, wherein the predetermined range is set for each of a pan angle,  
5 tilt angle, and zoom ratio of said video input means.

34. The apparatus according to claim 30, wherein said computation means computes a plurality of displacement image sensing positions that interpolate between two image sensing positions.

10 35. The apparatus according to claim 32, further comprising means for displaying and selecting displacement images so as to select an image to be included in a document.

36. The apparatus according to claim 30, further  
15 comprising means for sensing an image over a broad range and storing the sensed image in image recording means when image sensing is done on the basis of the schedule information.

37. The apparatus according to claim 30, wherein the  
20 document information is HTML document information.

38. The apparatus according to claim 30, further comprising edit means for deleting, inserting, and adding an image in the document information created by said document creation means.

25 39. A method of controlling an information processing apparatus which comprises video input means capable of



remote-controlling an image sensing position, and makes  
the video input means capture an image in document  
information to be submitted via a network, comprising:

- the step of storing schedule information having  
5 an image sensing position and time of the video input  
means;

the step of computing a plurality of new image  
sensing positions on the basis of an image sensing  
position in the stored schedule information;

- 10 the step of activating the video input means in  
accordance with the computed, new image sensing  
position and the image sensing time, and saving an  
obtained image in predetermined image storage means;  
and

- 15 the step of creating document information on the  
basis of the image stored in the image storage means.

40. A storage medium that stores a computer program  
code for an information processing apparatus which  
comprises video input means capable of

- 20 remote-controlling an image sensing position, and makes  
the video input means capture an image in document  
information to be submitted via a network, storing:

a program code of the step of storing schedule  
information having an image sensing position and time

- 25 of the video input means;

a program code of the step of computing a plurality of new image sensing positions on the basis of an image sensing position in the stored schedule information;

5 a program code of the step of activating the video input means in accordance with the computed, new image sensing position and the image sensing time, and saving an obtained image in predetermined image storage means; and

10 a program code of the step of creating document information on the basis of the image stored in the image storage means.

41. An information processing apparatus for submitting document information including an image via  
15 a network, comprising:

image input means;

schedule input means for inputting schedule information pertaining to image capture of said image input means;

20 correction means for correcting the schedule information input by said schedule input means;

image storage means for storing an image obtained in accordance with new schedule information corrected by said correction means;

document creation means for creating document information on the basis of an image stored in said image storage means;

authentication means for authenticating if a  
5 candidate document is submitted onto the network; and

submission control means for controlling  
submission of the candidate document onto the network  
in accordance with a predetermined condition  
irrespective of an authentication result of said  
10 authentication means.

42. The apparatus according to claim 41, wherein said  
submission control means submits a document to a  
document browsing server provided on the network, and  
updates an old document present on the server.

15 43. The apparatus according to claim 41, wherein said  
submission control means includes selection means for  
selecting a document with high submission priority from  
candidate documents previously created by said document  
creation means.

20 44. The apparatus according to claim 43, wherein said  
selection means selects a document with high priority  
on the basis of edit histories of individual candidate  
documents.

45. The apparatus according to claim 44, wherein said  
25 selection means selects a candidate document with the  
longest edit history.

46. The apparatus according to claim 44, wherein said selection means selects a document with high priority on the basis of the number of times of edit and a latest update date of a document.

5 47. The apparatus according to claim 44, wherein said selection means selects a document on the basis of the number of times of support when a support instruction is issued to a candidate document created by said document creation means.

10 48. The apparatus according to claim 44, wherein said  
selection means selects a candidate document with  
reference to the number of times of selection of an  
image assigned to the document.

49. The apparatus according to claim 41, wherein said  
15 selection means includes means for displaying a list of  
candidate documents.

50. A method of controlling an information processing  
apparatus which comprises image input means and submits  
document information including an image via a network,  
20 comprising:

the schedule input step of inputting schedule information pertaining to image capture of the image input means;

the correction step of correcting the schedule  
25 information input in the schedule input step;

the image storage step of storing an image  
obtained in accordance with new schedule information  
corrected in the correction step;

the document creation step of creating document  
5 information on the basis of an image stored in the  
image storage step;

the authentication step of authenticating if a  
candidate document is submitted onto the network; and

the submission control step of controlling  
10 submission of the candidate document onto the network  
in accordance with a predetermined condition  
irrespective of an authentication result in the  
authentication step.

51. A storage medium that stores a program code for  
15 an information processing apparatus which comprises  
image input means and submits document information  
including an image via a network, storing:

a program code of the schedule input step of  
inputting schedule information pertaining to image  
20 capture of the image input means;

a program code of the correction step of  
correcting the schedule information input in the  
schedule input step;

a program code of the image storage step of  
25 storing an image obtained in accordance with new  
schedule information corrected in the correction step;

a program code of the document creation step of creating document information on the basis of an image stored in the image storage step;

a program code of the authentication step of authenticating if a candidate document is submitted onto the network; and

a program code of the submission control step of controlling submission of the candidate document onto the network in accordance with a predetermined condition irrespective of an authentication result in the authentication step.

52. An information processing apparatus for submitting document information including an image via a network, comprising:

15 image input means;

schedule storage means for storing input schedule information of said image input means;

image storage means for storing an image obtained in accordance with the schedule information;

20 document creation means for creating new document information by substituting an image in the document information by the image stored in said image storage means; and

setting means for setting a condition for inhibiting an image, which is input by said image input means and is stored, from being published,

wherein an image that satisfies the condition set by said setting means is determined not to be published, and is excluded from images to be submitted.

53. The apparatus according to claim 52, wherein  
5 submission means submits a document to a document browsing server provided on the network, and updates an old document present on the server.

54. The apparatus according to claim 52, wherein said setting means sets a publication inhibition time band  
10 together with the schedule information.

55. The apparatus according to claim 52, wherein said setting means sets conditions in units of image sensing positions together with the schedule information.

56. The apparatus according to claim 52, wherein  
15 control means saves each obtained image in said image storage means in association with an image sensing position and time.

57. The apparatus according to claim 52, wherein submission means checks if a document to be submitted  
20 includes an image which is set not to be published by said setting means, and substitutes that image by predetermined information if such image is found.

58. The apparatus according to claim 52, further comprising authentication means for authenticating  
25 submission of a created candidate document, and

submission means for, when an authentication process of said authentication means is not done after a predetermined time has passed, determining the candidate document as an authentic document to be submitted onto the network, and submitting the determined document.

59. A method of controlling an information processing apparatus which has image input means and submits document information including an image via a network, comprising:

the schedule storage step of storing input schedule information of the image input means;

the image storage step of storing an image obtained in accordance with the schedule information;

the document creation step of creating new document information by substituting an image in the document information by the image stored in the image storage step; and

the setting step of setting a condition for inhibiting an image, which is input by the image input means and is stored, from being published,

wherein an image that satisfies the condition set in the setting step is determined not to be published, and is excluded from images to be submitted.

60. A storage medium that stores a program code for an information processing apparatus which has image



input means and submits document information including  
an image via a network, storing:

a program code of the schedule storage step of  
storing input schedule information of the image input

5 means;

a program code of the image storage step of  
storing an image obtained in accordance with the  
schedule information;

a program code of the document creation step of  
10 creating new document information by substituting an  
image in the document information by the image stored  
in the image storage step; and

a program code of the setting step of setting a  
condition for inhibiting an image, which is input by  
15 the image input means and is stored, from being  
published,

wherein an image that satisfies the condition set  
in the setting step is determined not to be published,  
and is excluded from images to be submitted.

20 61. An information processing apparatus for updating  
an image in document information to be submitted via a  
network, comprising:

video input means capable of remote-controlling  
an image sensing position;

schedule storage means for storing schedule information having an image sensing position and time of said video input means;

control means for activating said video input  
5 means in accordance with the schedule information stored in said schedule storage means, and saving an obtained image in predetermined image storage means;

document creation means for creating new document information with reference to old document information  
10 on the basis of the image stored in the image storage means;

submission means for, when an authentication process is not done for a created candidate document after a predetermined time has passed, determining the  
15 candidate document as an authentic document to be submitted onto the network, and submitting the determined document; and

setting means for setting a condition for inhibiting an image, which is input by said video input  
20 means and is stored, from being published,

wherein an image that satisfies the condition set by said setting means is determined not to be published, and is excluded from images to be submitted.

62. The apparatus according to claim 61, wherein said  
25 submission means submits a document to a document

browsing server provided on the network, and updates an old document present on the server.

63. The apparatus according to claim 61, wherein said setting means sets a publication inhibition time band  
5 together with the schedule information.

64. The apparatus according to claim 61, wherein said setting means sets conditions in units of image sensing positions together with the schedule information.

65. The apparatus according to claim 61, wherein said  
10 control means saves each obtained image in said image storage means in association with an image sensing position and time.

66. The apparatus according to claim 61, wherein submission means checks if a document to be submitted  
15 includes an image which is set not to be published by said setting means, and substitutes that image by predetermined information if such image is found.

67. A method of controlling an information processing apparatus which comprises video input means capable of  
20 remote-controlling an image sensing position and makes the video input means capture an image in document information to be submitted via a network, comprising:

the schedule storage step of storing schedule information having an image sensing position and time  
25 of the video input means;

the control step of activating the video input means in accordance with the schedule information stored in the schedule storage step, and saving an obtained image in predetermined image storage means;

5 the document creation step of creating new document information with reference to old document information on the basis of the image stored in the image storage means;

the submission step of, when an authentication  
10 process is not done for a created candidate document after a predetermined time has passed, determining the candidate document as an authentic document to be submitted onto the network, and submitting the determined document; and

15 the setting step of setting a condition for inhibiting an image, which is input by the video input means and is stored, from being published,

wherein an image that satisfies the condition set in the setting step is determined not to be published,  
20 and is excluded from images to be submitted.

68. A storage medium that stores a computer program code for an information processing apparatus which comprises video input means capable of remote-controlling an image sensing position and makes  
25 the video input means capture an image in document information to be submitted via a network, storing:

a program code of the schedule storage step of storing schedule information having an image sensing position and time of the video input means;

a program code of the control step of activating  
5 the video input means in accordance with the schedule information stored in the schedule storage step, and saving an obtained image in predetermined image storage means;

a program code of the document creation step of  
10 creating new document information with reference to old document information on the basis of the image stored in the image storage means;

a program code of the submission step of, when an authentication process is not done for a created  
15 candidate document after a predetermined time has passed, determining the candidate document as an authentic document to be submitted onto the network, and submitting the determined document;

a program code of the setting step of setting a  
20 condition for inhibiting an image, which is input by the video input means and is stored, from being published,

wherein an image that satisfies the condition set in the setting step is determined not to be published,  
25 and is excluded from images to be submitted.

ABSTRACT OF THE DISCLOSURE

This invention allows easy update of an image to be included in a document which is submitted on the network. For this purpose, data that set the image sensing times and image sensing states of a camera (111) the pan angle, tilt angle, and zoom ratio of which can be varied, are stored in an HD (106). If one of the stored times has been reached, image sensing is done in accordance with the set contents, and the obtained image is stored in the HD (106). Upon launching a candidate edit program, an old document inserted with images is displayed on a CRT (103). When a desired image is designated, it is substituted by a new, sensed image candidate corresponding to that designation position. The created document is then uploaded to a WWW server.

FIG. 1

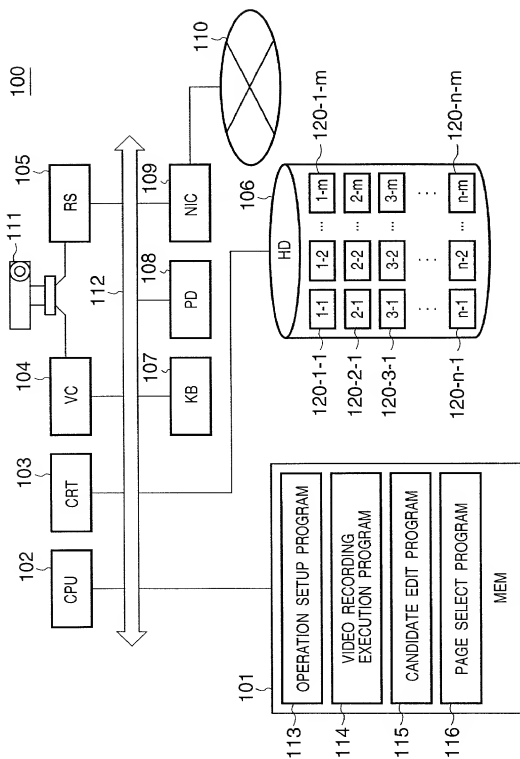


FIG. 2

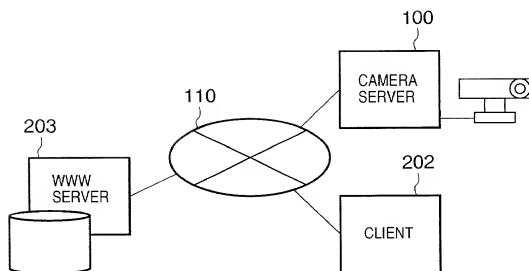




FIG. 3

301

IMAGE RECORDING SETUP

302

FROM IMAGE SENSING START TIME 10:00

304

TO IMAGE SENSING END TIME 11:40

AT IMAGE SENSING INTERVAL 20 MIN

303

IMAGE POSITION SETUP

PRESET NUMBER	1	2	3	4	5
PAN	9.72	12.00	21.50	11.30	
TILT	0.00	0.00	0.00	0.00	
ZOOM	46.80	46.80	46.80	40.00	

306-1p

306-1t

306-1z

306-2p

306-2t

306-2z

307

SETUP SAVE

CANCEL

FIG. 4

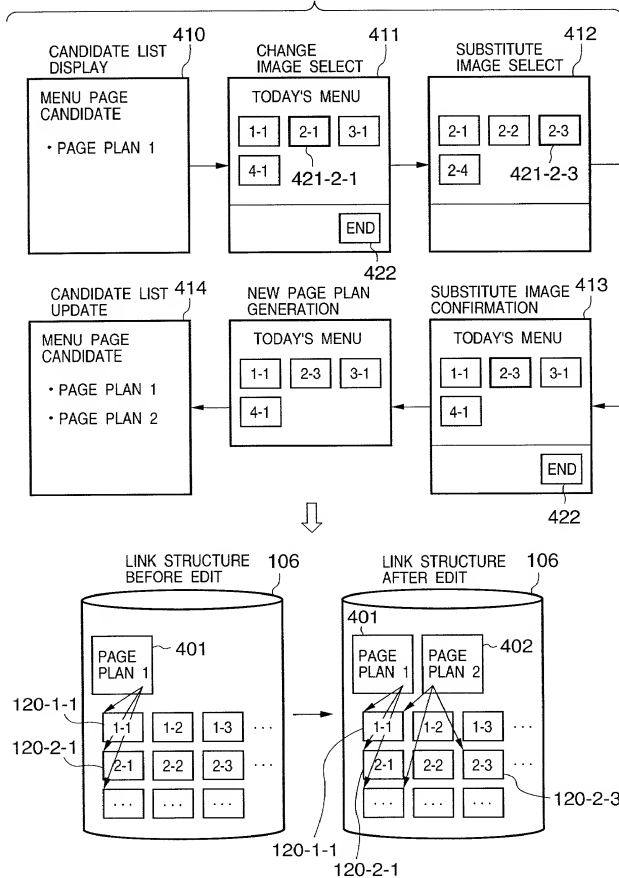


FIG. 5

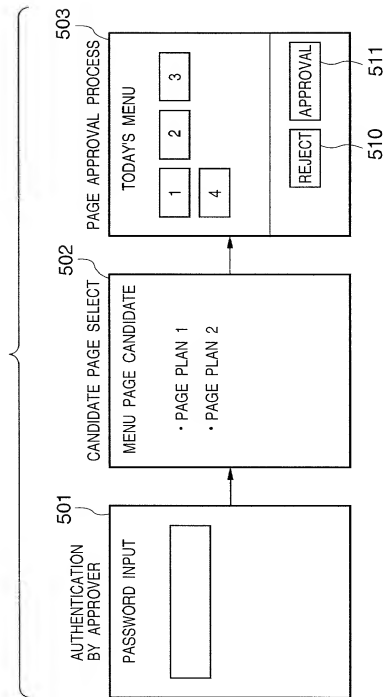
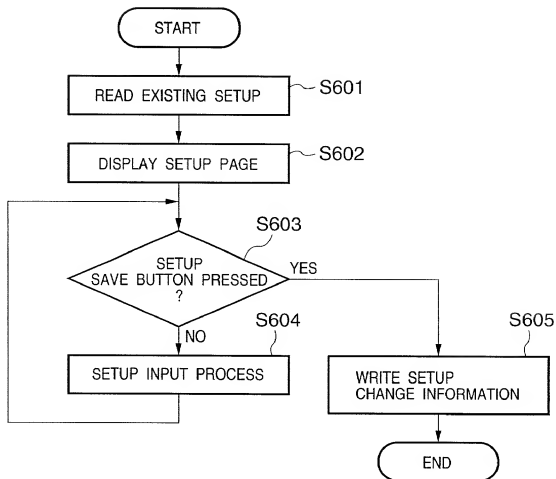


FIG. 6




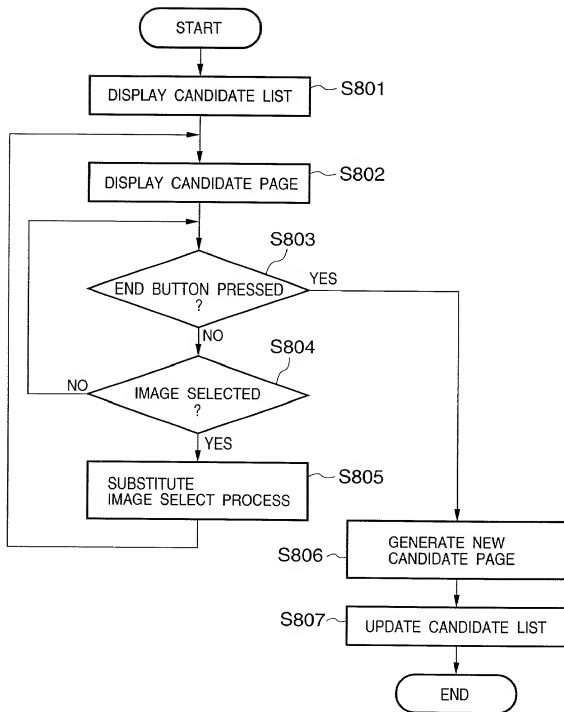
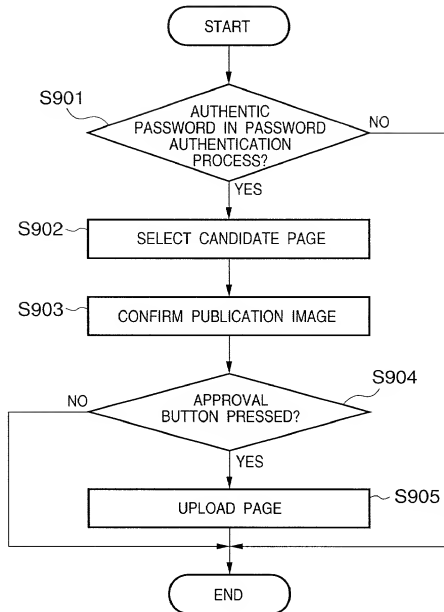
**FIG. 7**

FIG. 8



**FIG. 9**

10/66

FIG. 10

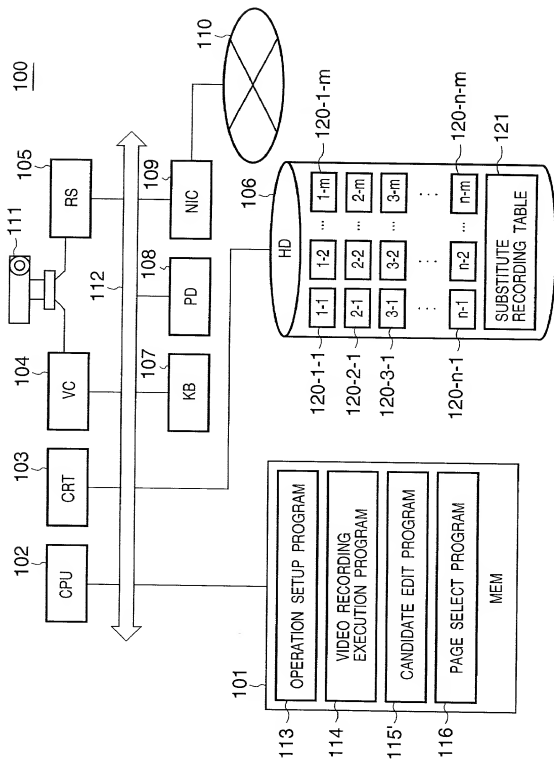




FIG. 11

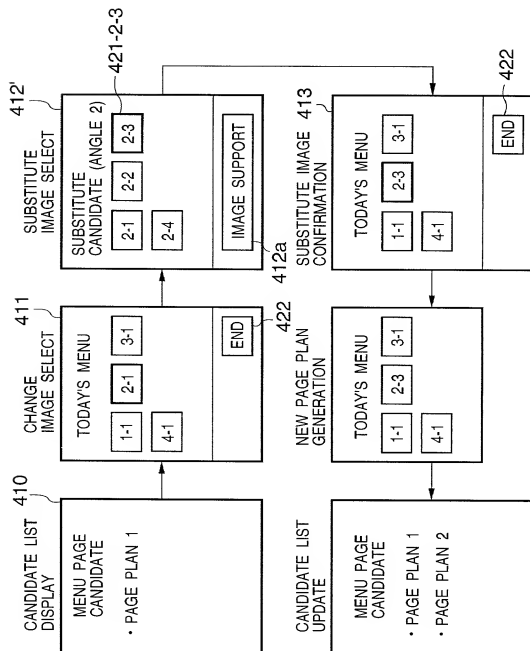
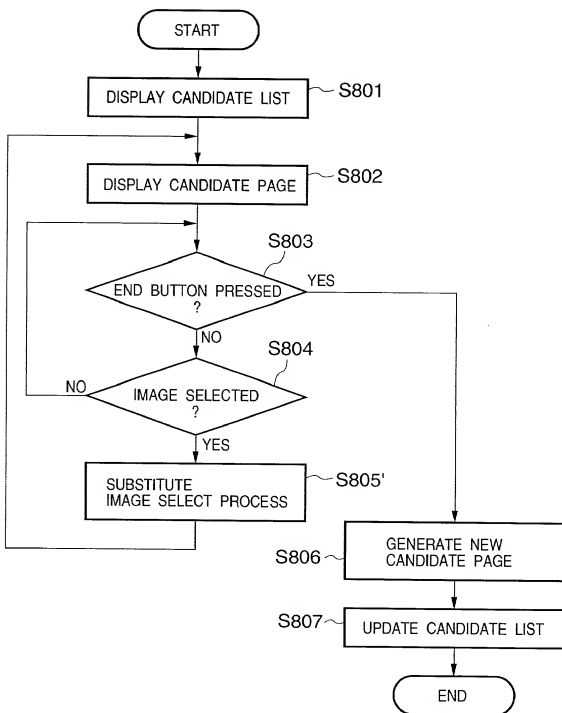


FIG. 12



**FIG. 13**

121

	PRESET 1	PRESET 2	PRESET 3	PRESET 4	...
PAGE 1					
PAGE 2	✓	✓			
PAGE 3	✓			✓	
...					

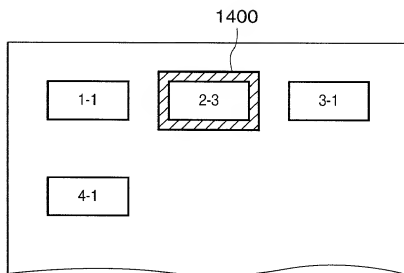
**FIG. 14**

FIG. 15

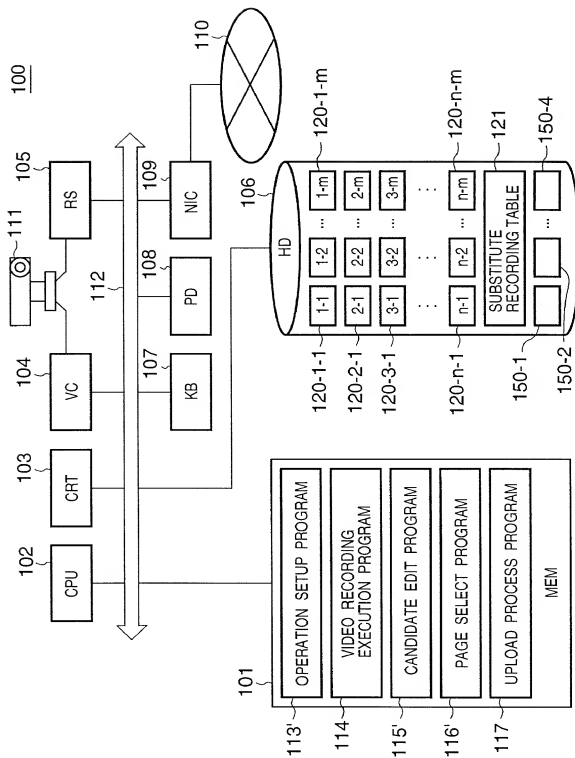


FIG. 16

301

IMAGE RECORDING SETUP

302

FROM IMAGE SENSING START TIME 10:00

304

TO IMAGE SENSING END TIME 11:40

AT IMAGE SENSING INTERVAL 20 MIN

303

306-1p

306-1t

306-1z

306-2p

306-2t

306-2z

151-1

151-2

307

IMAGE POSITION SETUP

PRESET NUMBER	1	2	3	4	5
PAN	9.72	12.00	21.50	11.30	
TILT	0.00	0.00	0.00	0.00	
ZOOM	46.80	46.80	46.80	40.00	
	file 1	file 2	file 3	file 4	

151-4

151-3

CANCEL

SETUP SAVE

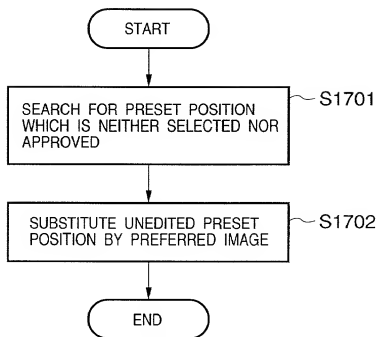
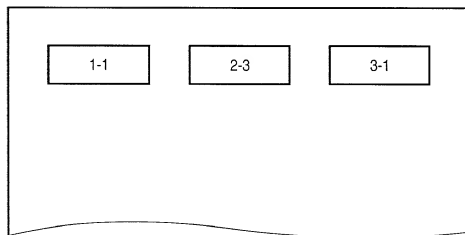
**FIG. 17****FIG. 18**

FIG. 19

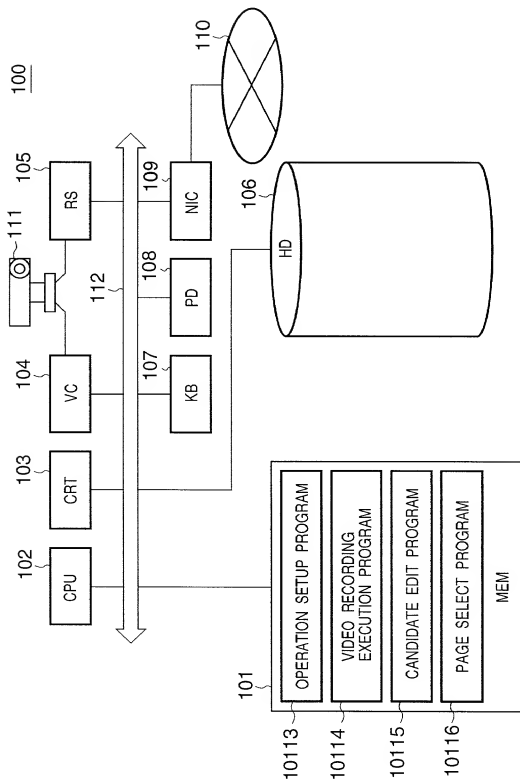
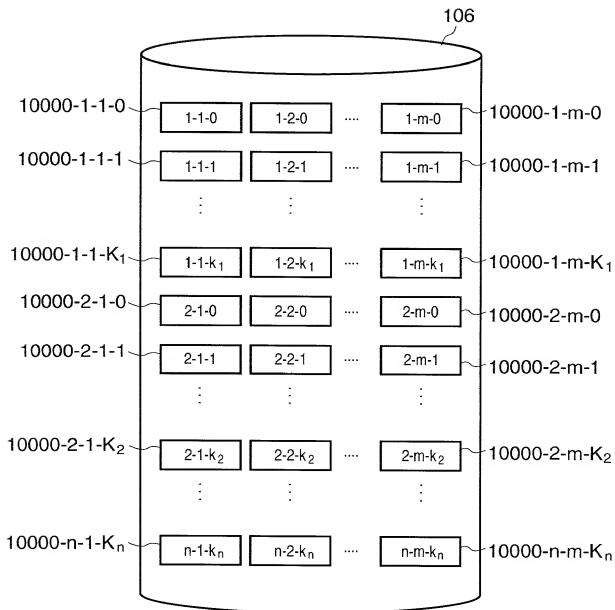




FIG. 20



**FIG. 21**

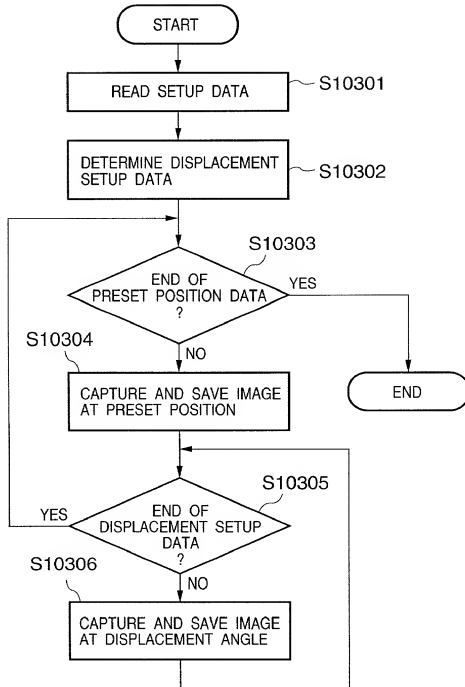
PAN VALUE	TILT VALUE	ZOOM VALUE
9.72	0.00	46.80
7.72	0.00	46.80
8.72	0.00	46.80
10.72	0.00	46.80
11.72	0.00	46.80
9.72	-2.00	46.80
9.72	-1.00	46.80
9.72	1.00	46.80
9.72	2.00	46.80
9.72	0.00	44.80
9.72	0.00	45.80
9.72	0.00	47.80
9.72	0.00	48.80

FIG. 22

10201

PRESET	PAN		TILT		ZOOM	
	DISPLACEMENT AMOUNT	DISPLACEMENT VALUE	DISPLACEMENT AMOUNT	DISPLACEMENT VALUE	DISPLACEMENT AMOUNT	DISPLACEMENT VALUE
1	1	$\pm 2$	1	$\pm 2$	1	$\pm 2$
2	1	$\pm 1$	0	0	0	0
3	0.5	$\pm 2$	0.5	$\pm 2$	1	-1
4	2	$\pm 1$	2	$\pm 1$	2	+2
5						

FIG. 23



# 2025 RELEASE UNDER E.O. 14176



FIG. 25

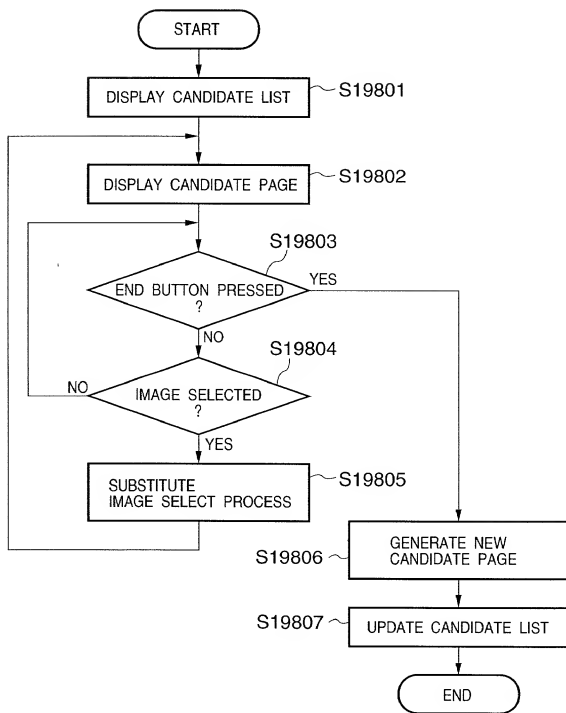


FIG. 26

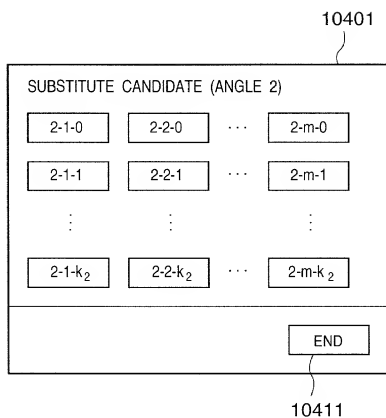


FIG. 27

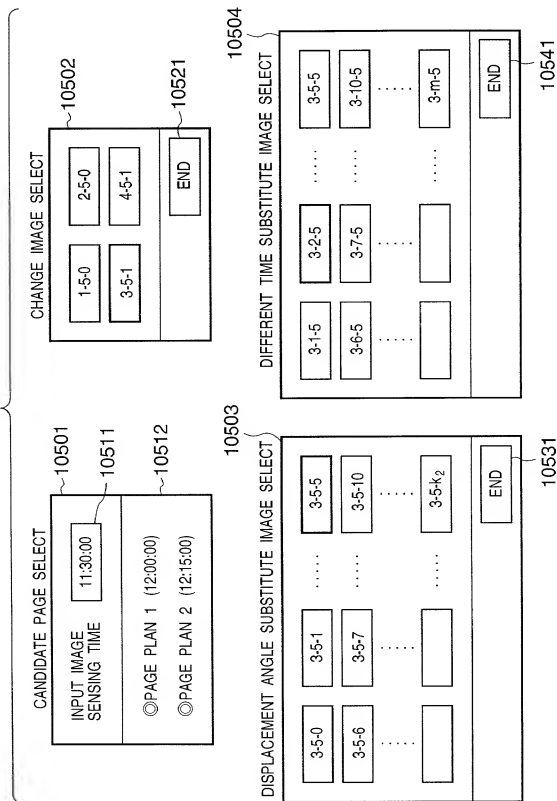




FIG. 28

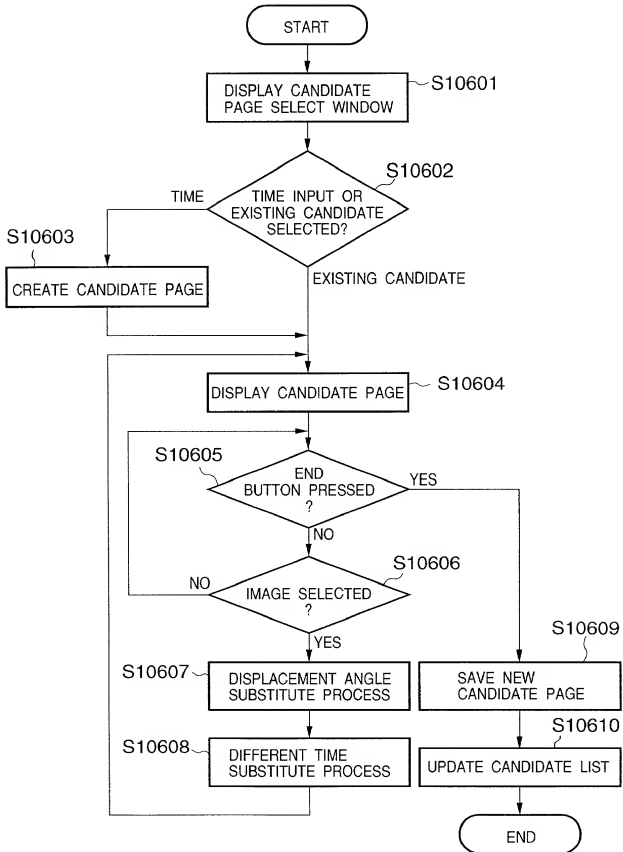


FIG. 29

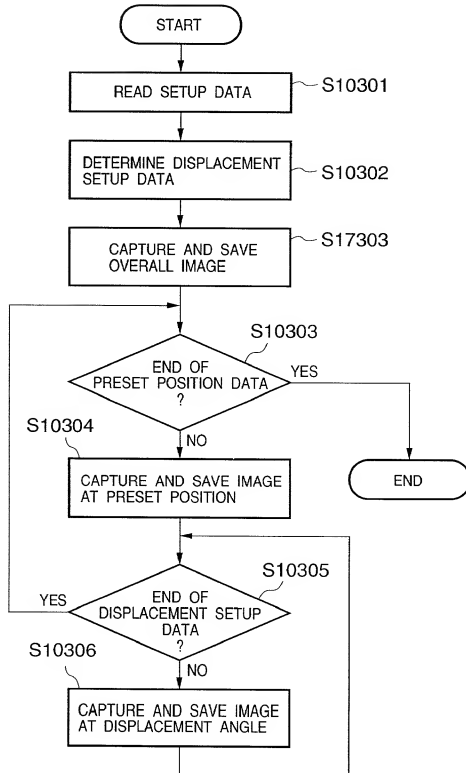
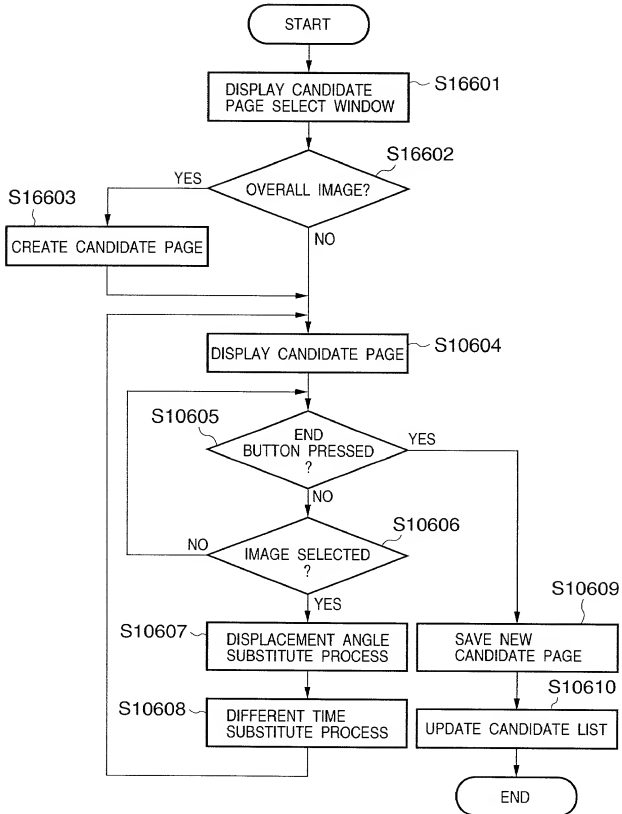


FIG. 30



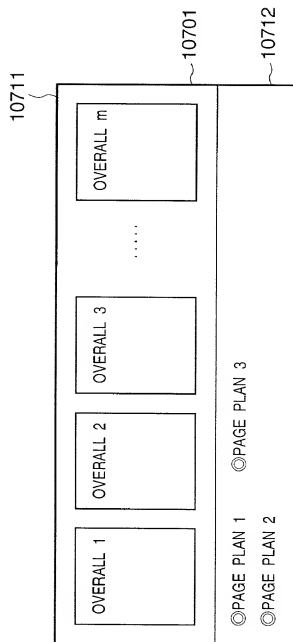
**FIG. 31**

FIG. 32

301

IMAGE RECORDING SETUP

302

FROM IMAGE SENSING START TIME 10:00

304

TO IMAGE SENSING END TIME 11:40

AT IMAGE SENSING INTERVAL 20 MIN

303

201-01 201-02 201-03 201-04

IMAGE POSITION SETUP

PRESET NUMBER	1	2	3	4	5
PAN	9.72	12.00	21.50	11.30	
TILT	0.00	0.00	0.00	0.00	
ZOOM	46.80	46.80	46.80	40.00	

306-1p 306-1t 306-1z

306-2p 306-2t 306-2z

307

SETUP SAVE CANCEL

FIG. 33

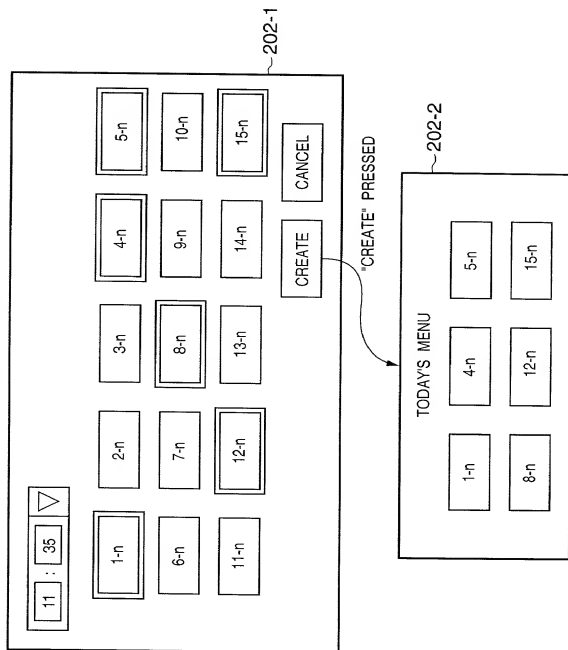
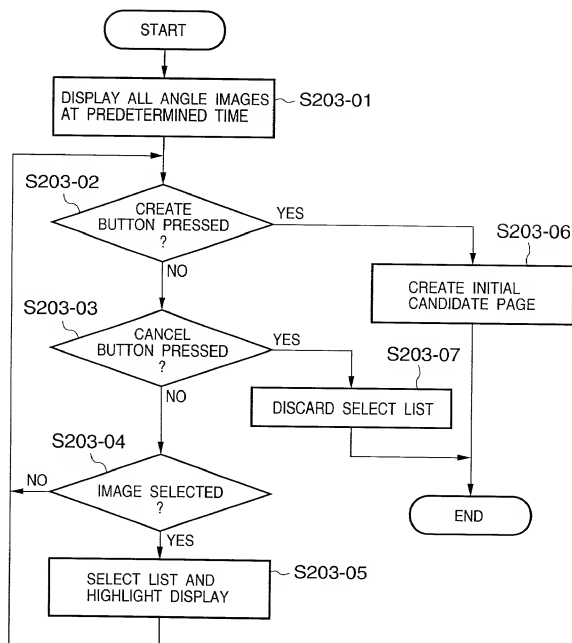


FIG. 34



## FIG. 35

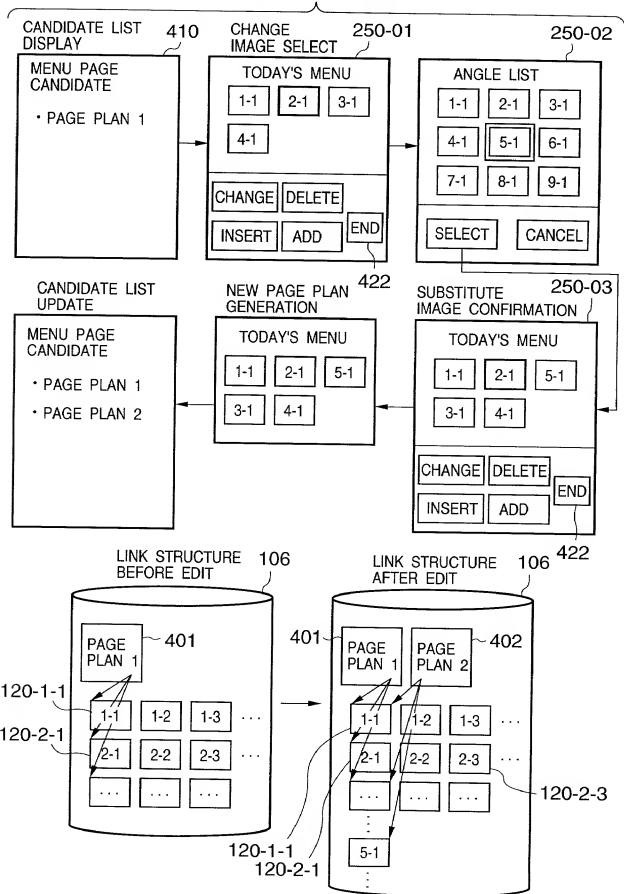




FIG. 36

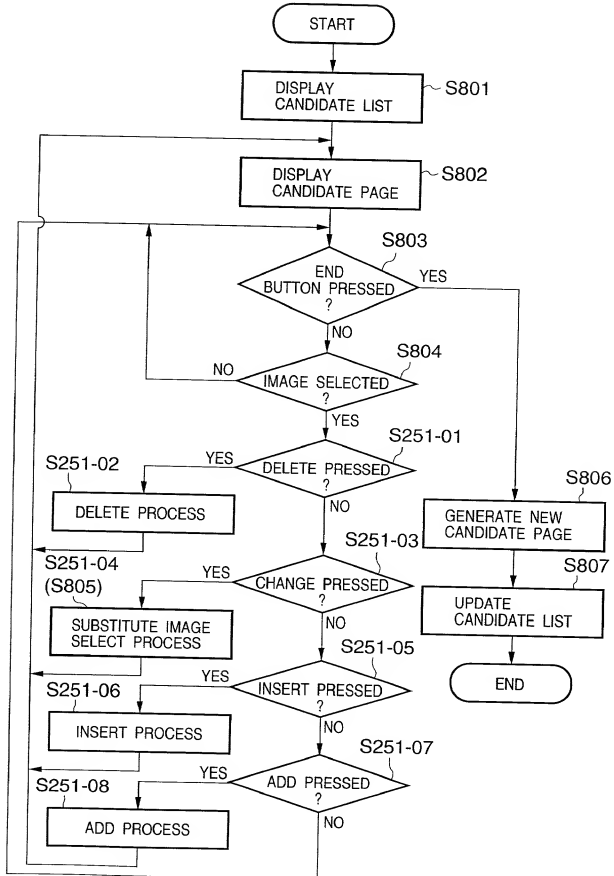


FIG. 37

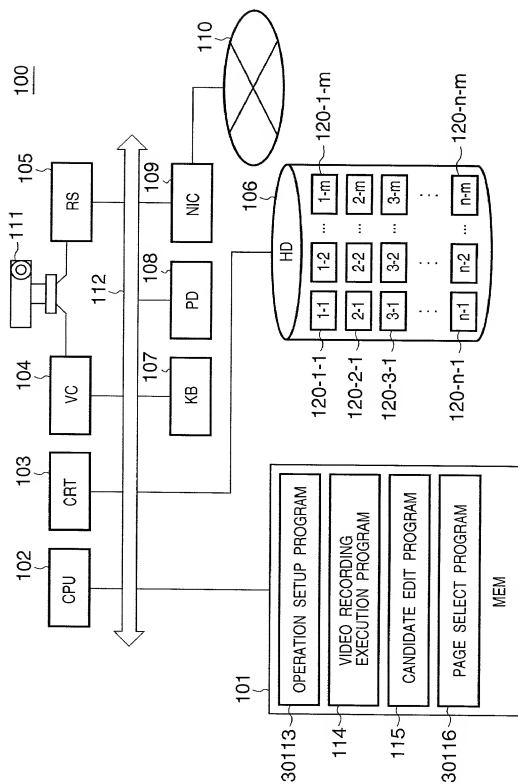


FIG. 38

301

IMAGE RECORDING SETUP

302

FROM IMAGE SENSING START TIME 10:00

TO IMAGE SENSING END TIME 11:40

AT IMAGE SENSING INTERVAL 20 MIN

303

AUTOMATIC SELECT TIME 12:00

30000

IMAGE POSITION SETUP

PRESET NUMBER	1	2	3	4	5
PAN	9.72	12.00	21.50	11.30	
TILT	0.00	0.00	0.00	0.00	
ZOOM	46.80	46.80	46.80	40.00	

306-1p

306-1t

306-1z

306-2p

306-2t

306-2z

307

SETUP SAVE

CANCEL

FIG. 39

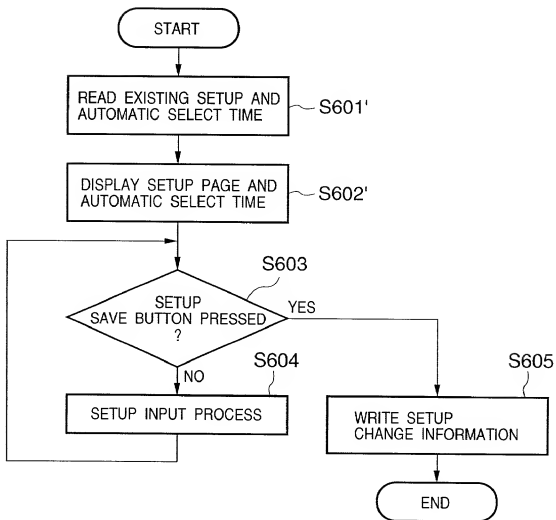


FIG. 40

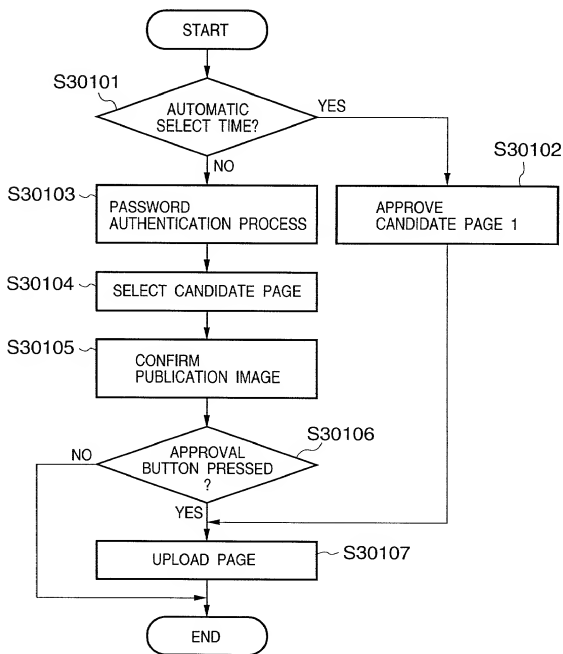


FIG. 41

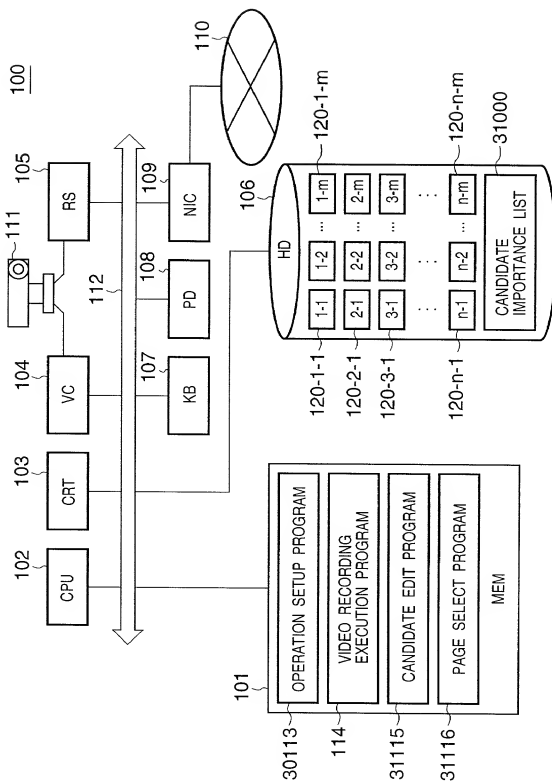
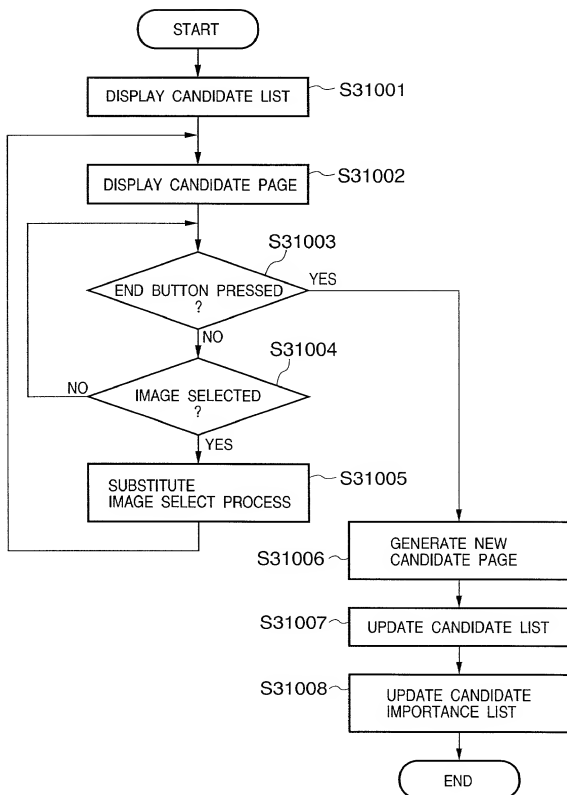


FIG. 42



**FIG. 43**

31000

PAGE 1	
PAGE 2	PAGE 1 →
PAGE 3	PAGE 1 → PAGE 2
PAGE 4	PAGE 1 → PAGE 2 → PAGE 3
PAGE 5	PAGE 1 → PAGE 2
...	...



FIG. 44

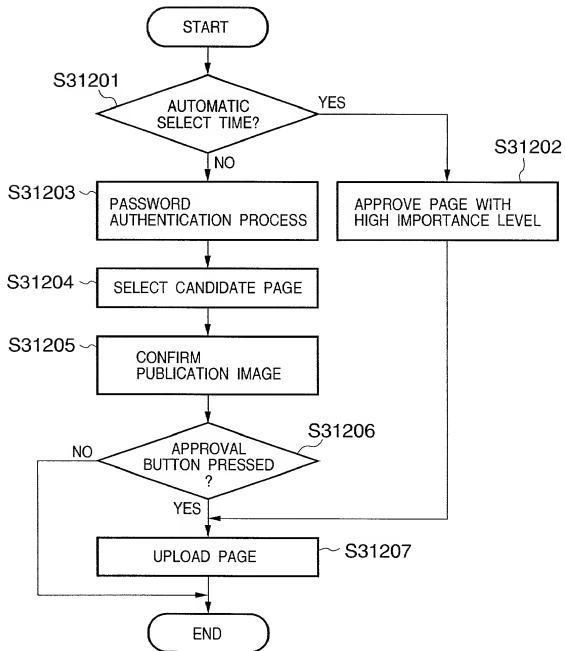
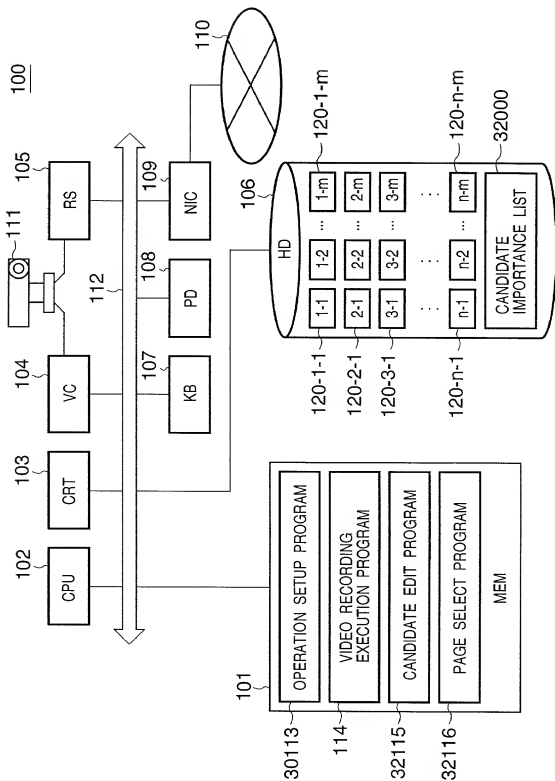


FIG. 45



**FIG. 46**

32000

PAGE 1	ZERO TIMES, 11:20
PAGE 2	ONCE, 11:25
PAGE 3	TWICE, 11:30
PAGE 4	THREE TIMES, 11:55
PAGE 5	TWICE, 11:40
PAGE 6	THREE TIMES, 11:45
...	...

002260-8E9Z9960

FIG. 47

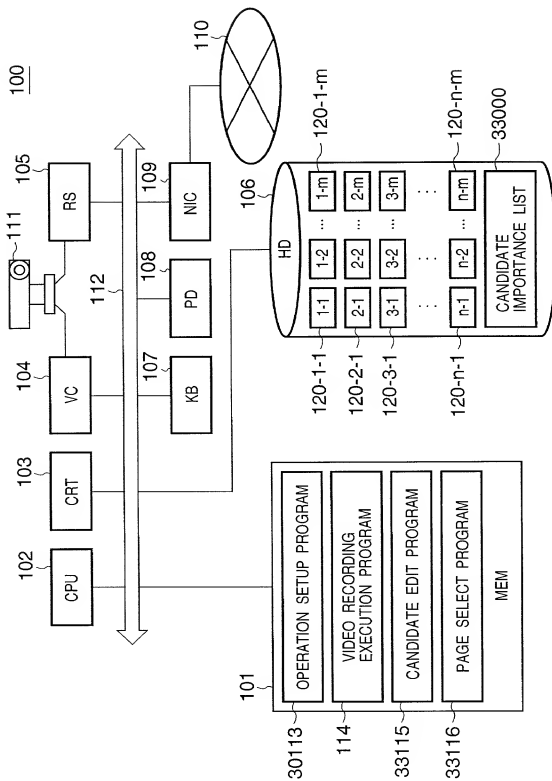


FIG. 48

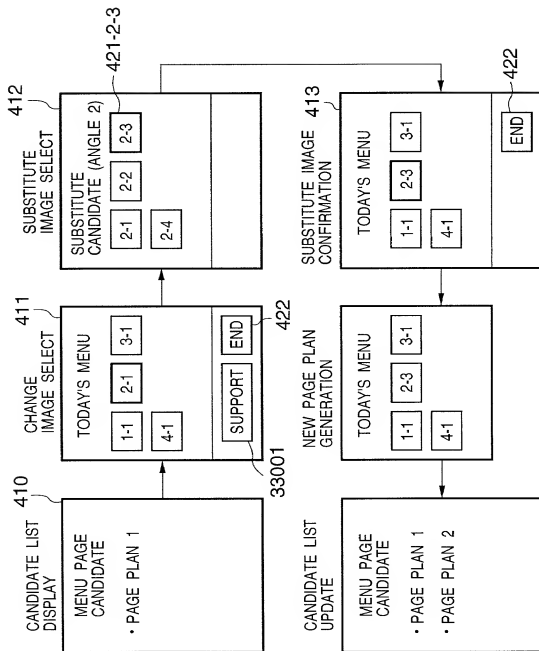
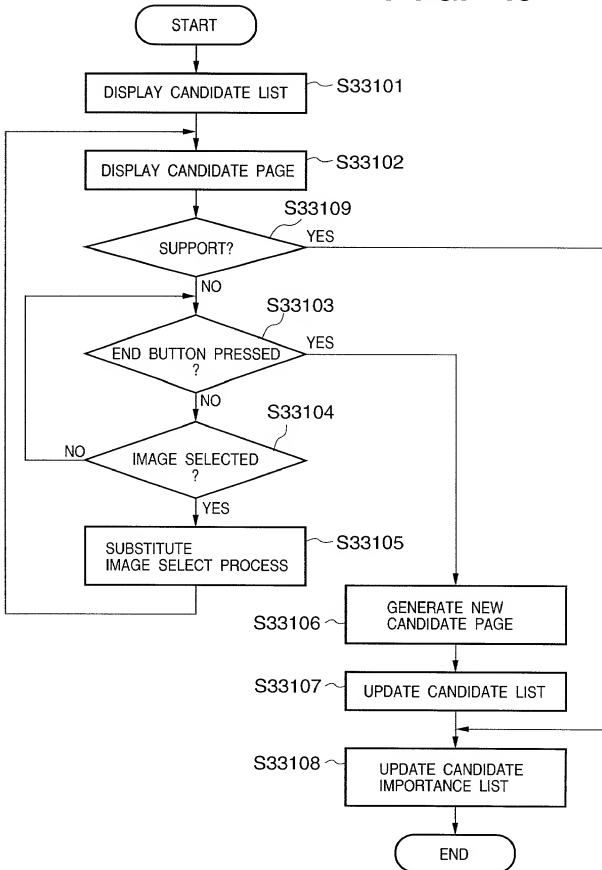


FIG. 49



**FIG. 50**

33000

PAGE 1	ZERO TIMES, 11:20, ONCE
PAGE 2	ONCE, 11:25, THREE TIMES
PAGE 3	TWICE, 11:30, ONCE
PAGE 4	THREE TIMES, 11:55, ZERO TIMES
PAGE 5	TWICE, 11:40, ZERO TIMES
PAGE 6	THREE TIMES, 11:45, ONCE
...	...

002260-83979960

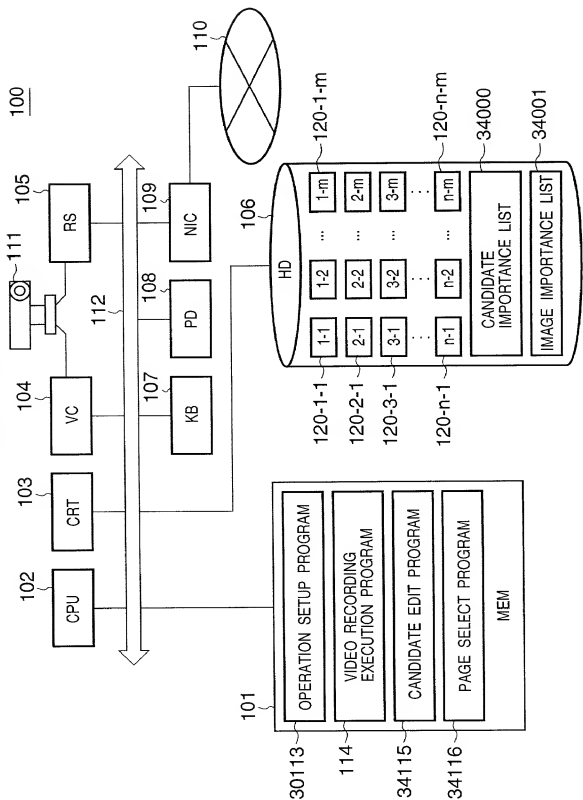
**FIG. 51**



FIG. 52

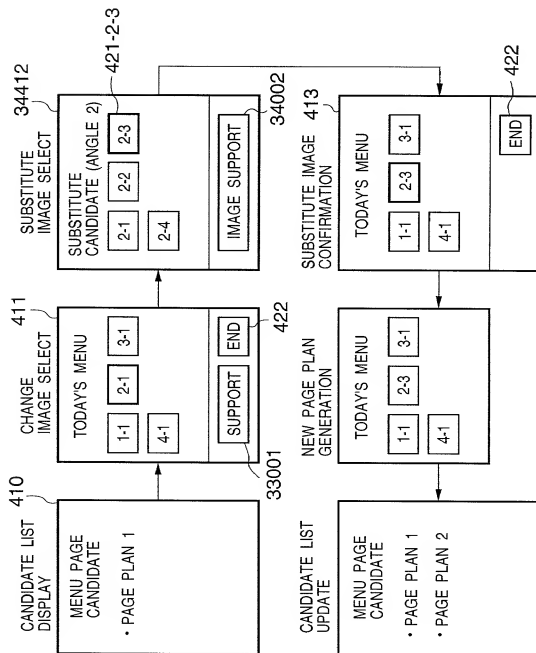
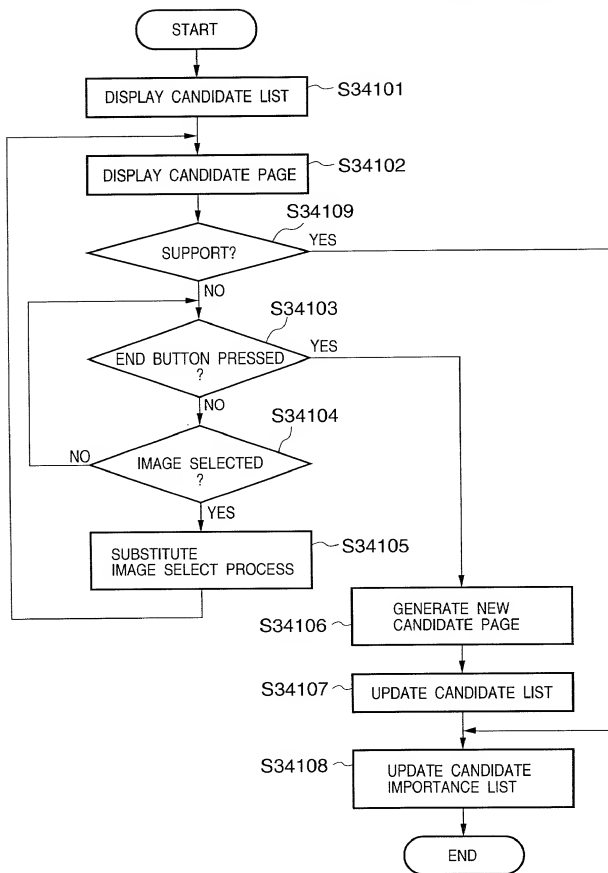


FIG. 53



**FIG. 54**

34001

	SELECT	SUPPORT
120-1-1	1	1
120-2-1	0	1
120-3-1	2	0
120-4-1	1	2
120-1-2	0	0
120-2-2	1	1
...	...	...

**FIG. 55**

34000

PAGE 1	ZERO TIMES, 11:20, ONCE	8
PAGE 2	ONCE, 11:25, THREE TIMES	6
PAGE 3	TWICE, 11:30, ONCE	6
PAGE 4	THREE TIMES, 11:55, ZERO TIMES	7
PAGE 5	TWICE, 11:40, ZERO TIMES	5
PAGE 6	THREE TIMES, 11:45, ONCE	7
...	...	...

FIG. 56

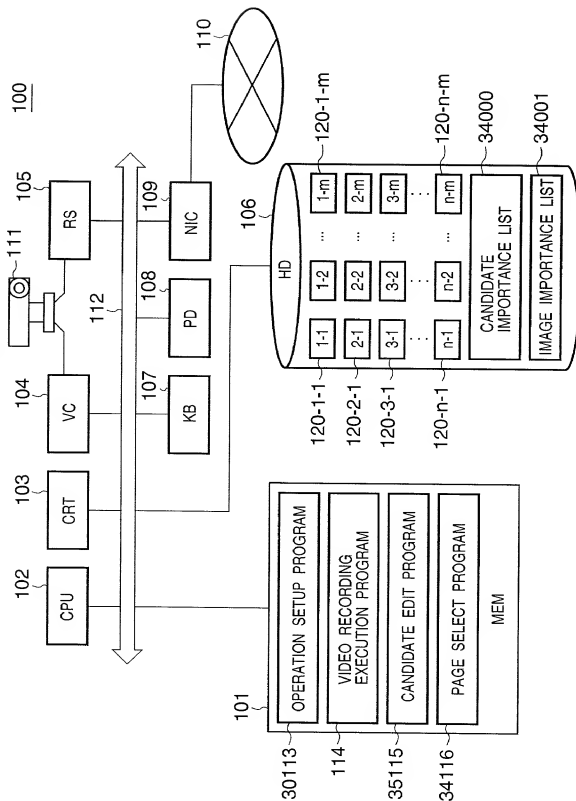
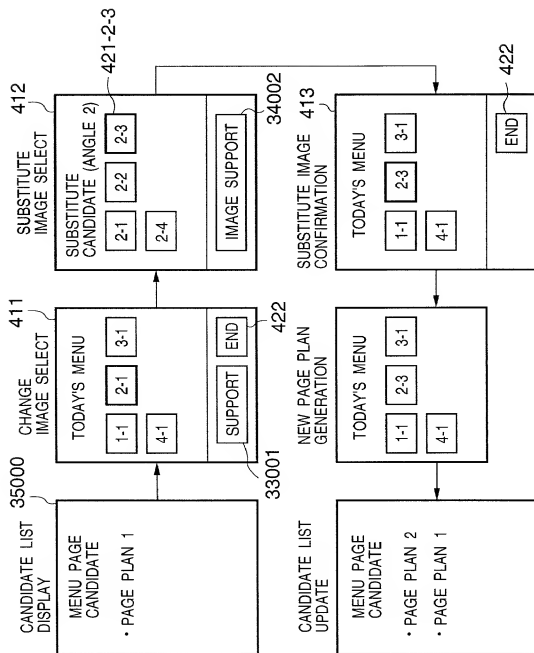


FIG. 57



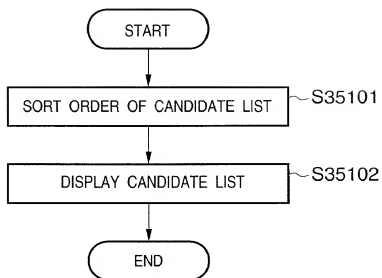
**FIG. 58**

FIG. 59

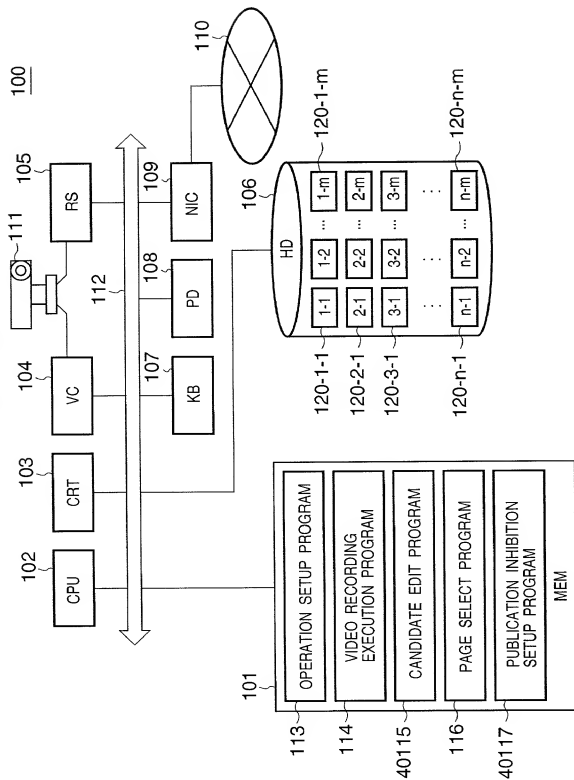


FIG. 60

41001

SETUP COMMON TO ALL POSITIONS

PUBLICATION INHIBITION TIME

FROM  41002

TO  41003

POSITION-DEPENDENT SETUP

PRESET NUMBER	1	2	3	4	5
41004	<input type="text" value="10:50"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	FROM	FROM	FROM	FROM	FROM
41005	<input type="text" value="11:00"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	TO	TO	TO	TO	TO
41006	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text" value="INHIBITION"/>	<input type="text"/>
FULL TIME INHIBITION					

41007 SETUP SAVE CANCEL



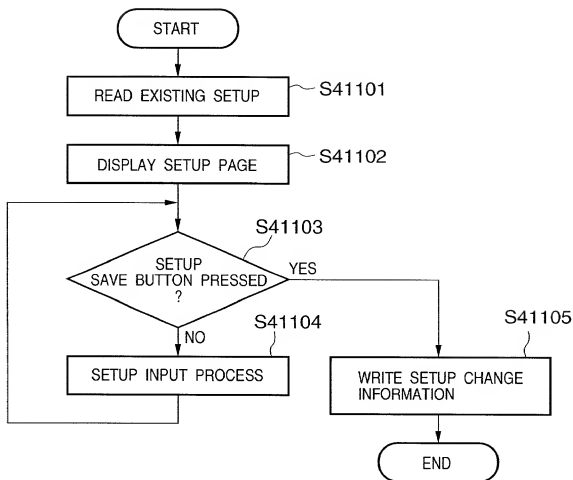
**FIG. 61**

FIG. 62

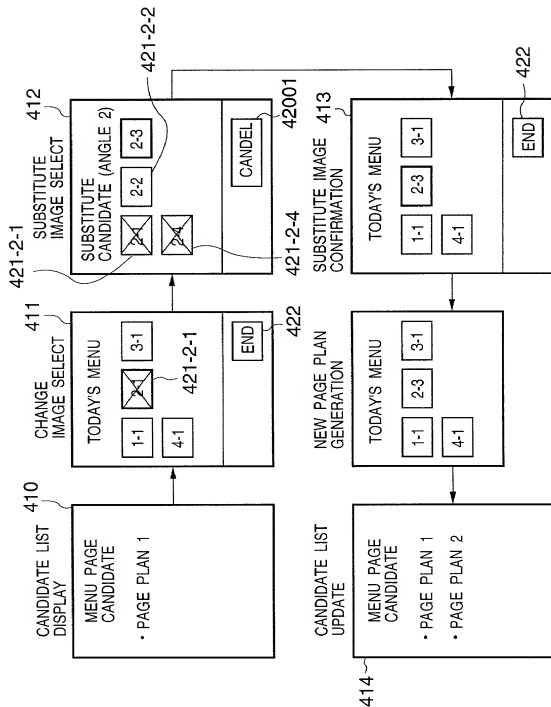
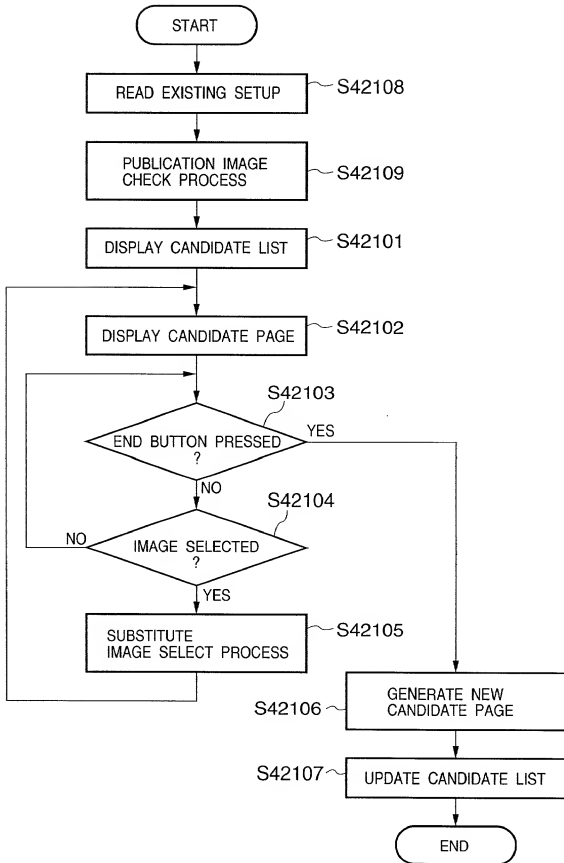


FIG. 63



**FIG. 64**

42201

	PUBLICATION
120-1-1	OK
120-2-1	OK
120-3-1	NG
120-4-1	OK
120-5-1	NG
120-1-2	NG
120-2-2	OK
⋮	⋮

FIG. 65

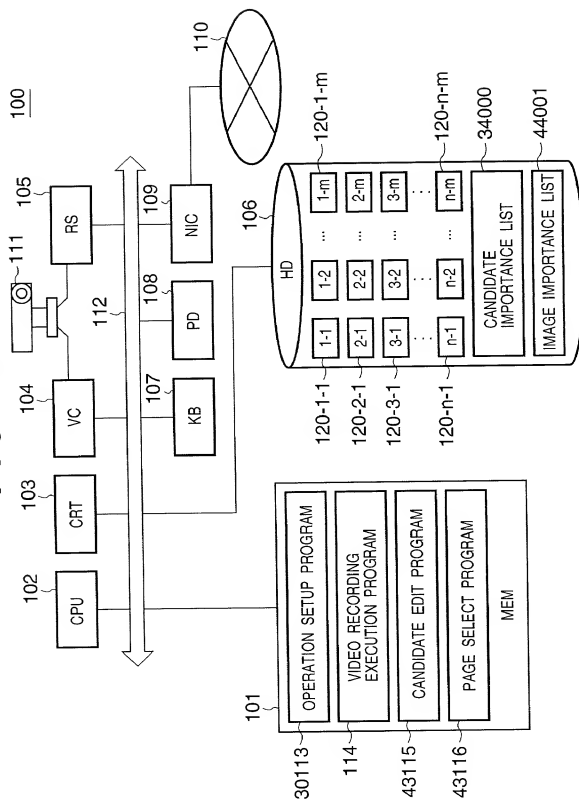
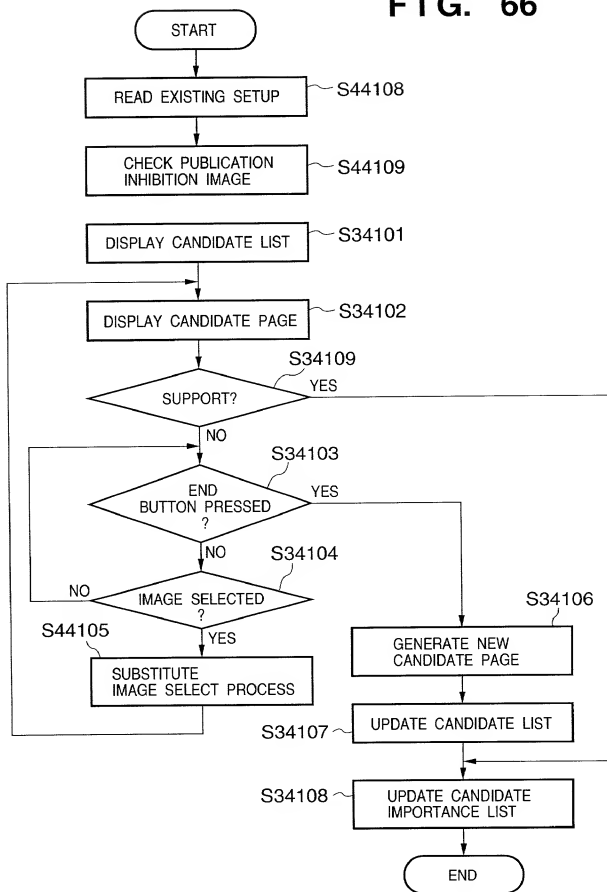


FIG. 66



**FIG. 67**

44001

	SELECT	SUPPORT	PUBLICATION
120-1-1	1	1	OK
120-2-1	0	1	OK
120-3-1	2	0	NG
120-4-1	1	2	OK
120-5-1	0	0	NG
120-1-2	0	0	NG
120-2-2	1	1	OK
...	...	...	...

**FIG. 68**